

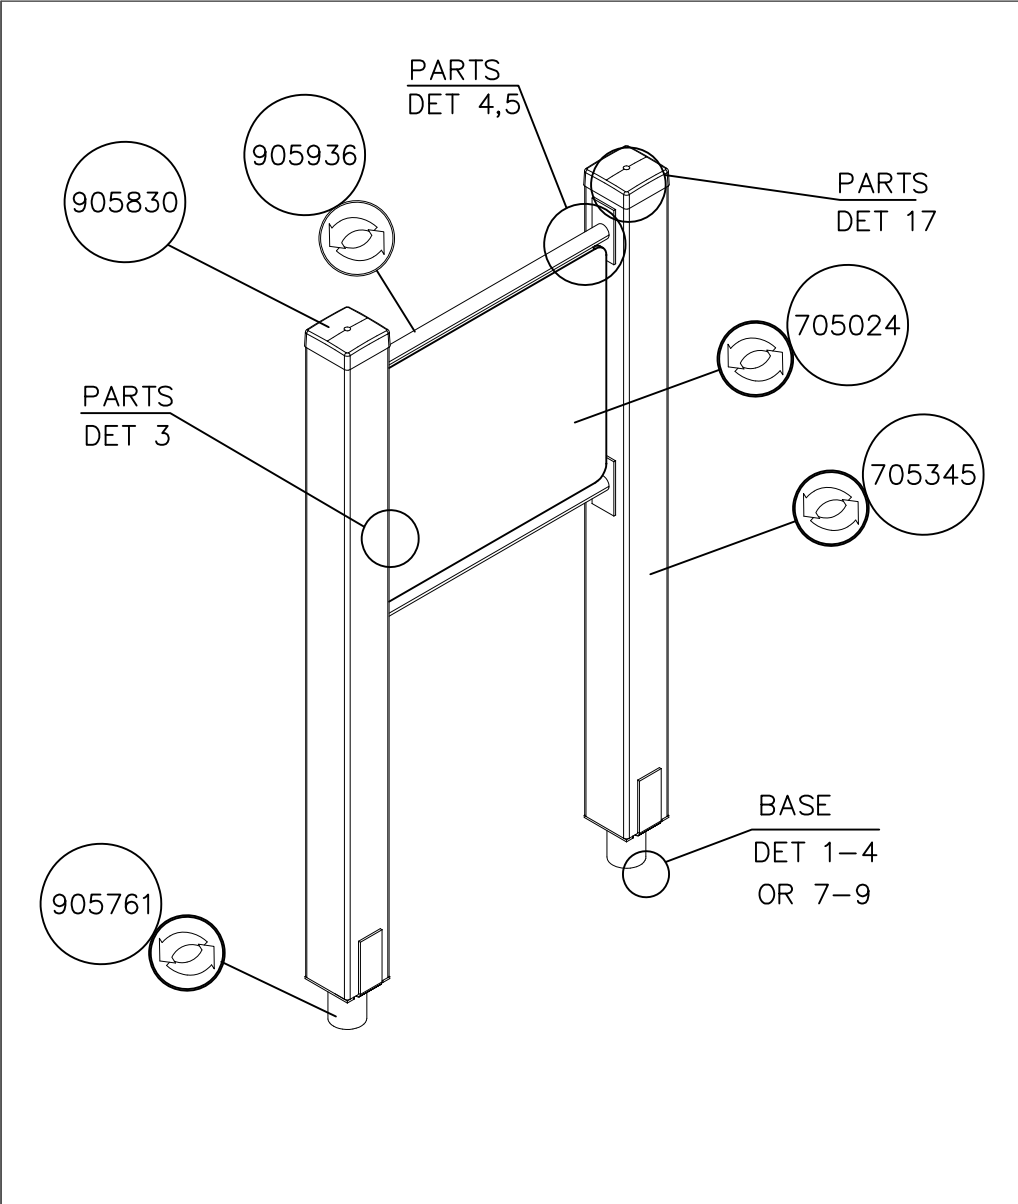
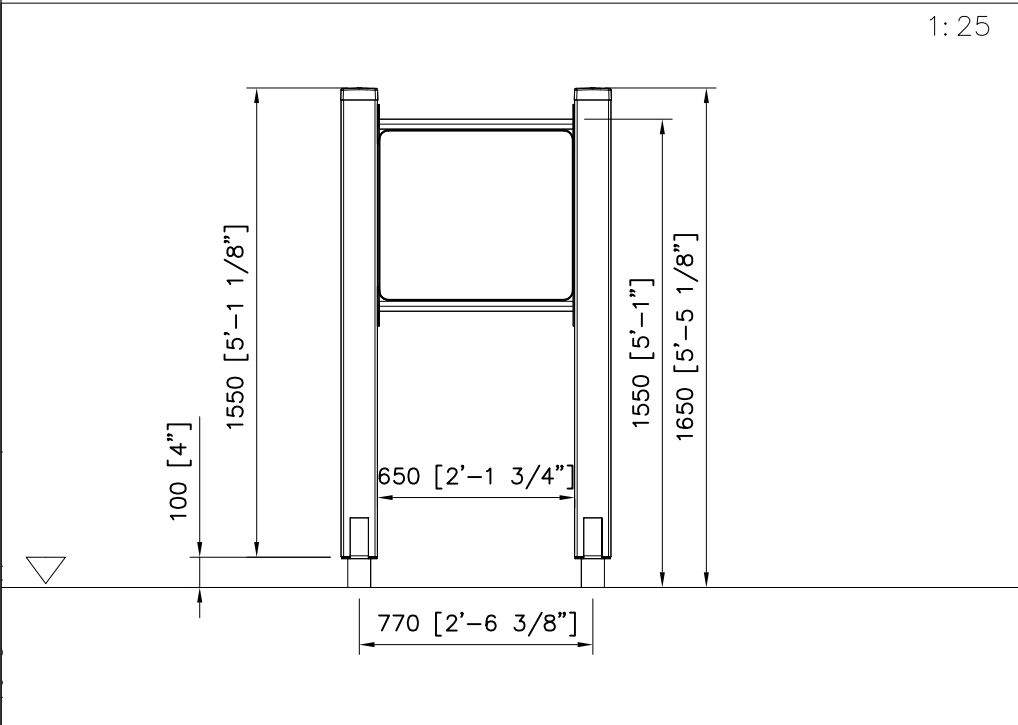







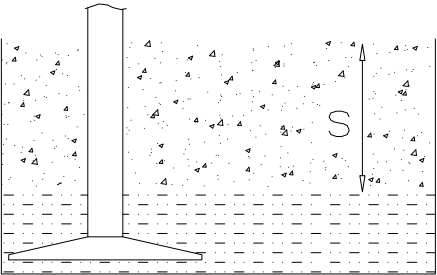


① 705024	PCS	② 705345	PCS
	1		2
15x640x560		120x120x1520	
③ 909633	PCS	④ 905104	PCS
	8		8
M8		M10	
⑤ 905761	PCS	⑥ 905830	PCS
	2		2
120x120x700		123x123x40	
⑦ 905936	PCS	⑧ 909256	PCS
	2		28
L=652		Ø16/8.4x1.6	
⑨ 909855	PCS	⑩ 980104	PCS
	8		2
M8x35		Ø5x90	
⑪ 980123	PCS		PCS
	20		
Ø7x60			
⑫ 901899 Optio	PCS		PCS
	8		
M8x45			
	PCS		PCS

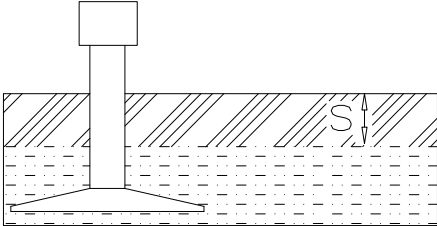

		
h < 600 Without movement and therefore without Impact Area	Totally hard surfaces.	E.g. concrete or asphalt 
h < 600 With movement e.g. rocking	Materials with very limited impact attenuating properties.	E.g. wood 
h < 1000	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  grass  unsorted sand 
h < 3000	Loose fill material	E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm  $\underline{S}$ 30 cm $\underline{h}$ < 2,0 m 40 cm < 3,0 m
	Syntethic granulates	$\underline{S}$ 40 mm ~> 1,2...1,3 m 50 mm ~> 1,5...1,7 m 60 mm ~> 1,8...2,0 m 70 mm ~> 2,1...2,5 m  Note. For accurate values, see manufacturer's instructions.

REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

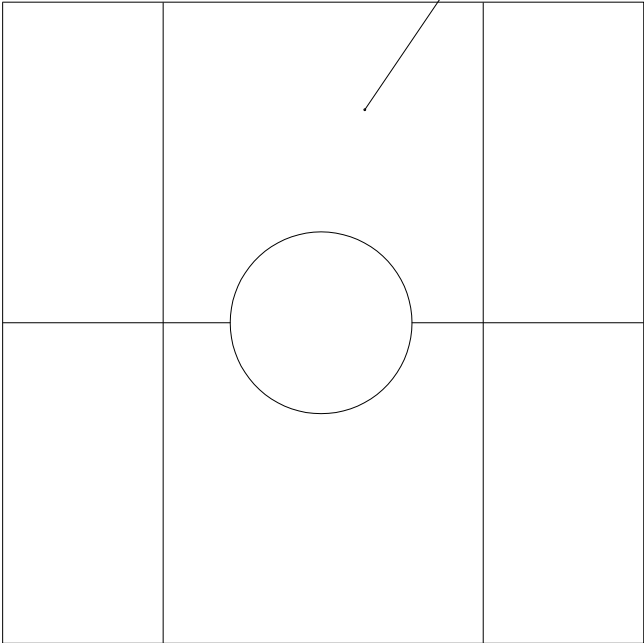

REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

