













		
h < 600 Without movement and therefore without Impact Area	Totally hard surfaces. Note. Lappset does <u>not</u> <u>recommend</u> totally hard surfaces at all.	E.g. concrete or asphalt 
h < 600 With movement e.g. rocking	Materials with very limited impact attenuating properties.	E.g. wood 
h < 1000	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  grass  unsorted sand 
h < 3000	Loose fill material E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm	 <u>S</u> 30 cm 40 cm <u>h</u> < 2,0 m < 3,0 m
	Syntethic granulates <u>S</u> 40 mm ~> 1,2...1,3 m 50 mm ~> 1,5...1,7 m 60 mm ~> 1,8...2,0 m 70 mm ~> 2,1...2,5 m Note. For accurate values, see manufacturer's instructions. 	

REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

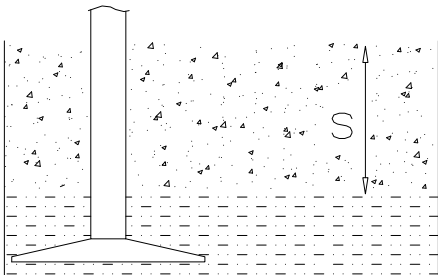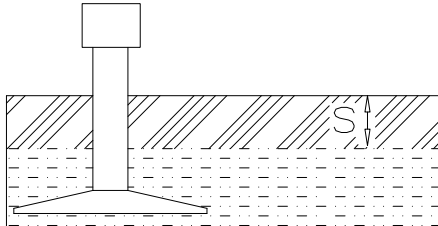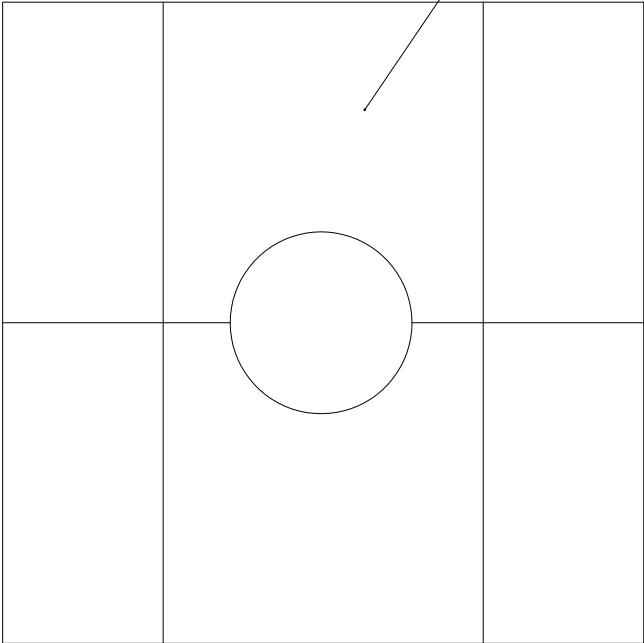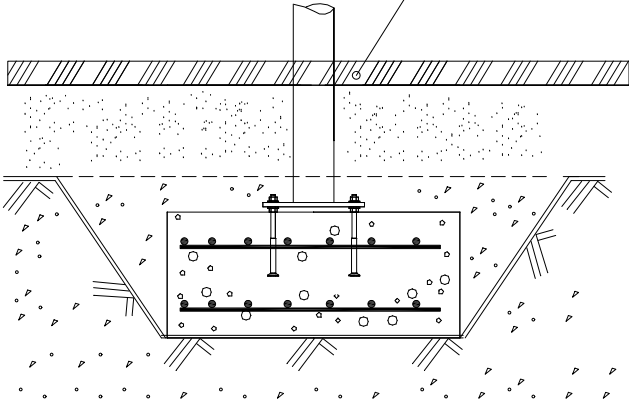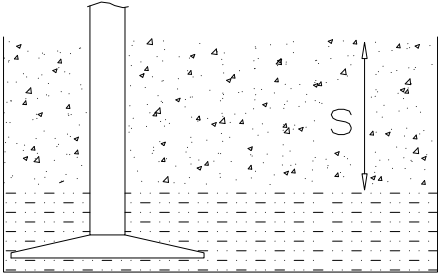

REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

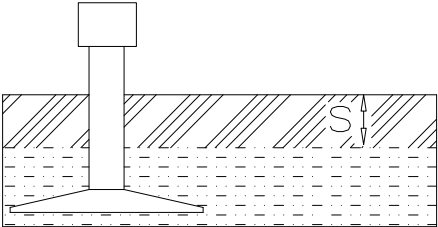

		
h < 1000	Totally hard surfaces or materials with very limited impact attenuating properties. Case by case risk assessment is needed including e.g. evaluation whether there is forced movement, what is the intended exercise and where will the product be installed.	Totally hard surfaces. E.g. concrete or asphalt  Materials with very limited impact attenuating properties. E.g. wood 
h < 1200	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  Unsorted sand/ topsoil 
h < 1500		Lawn 
h < 3000	Loose fill material E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm	 <u>S</u> 30 cm 40 cm <u>h</u> < 2,0 m < 3,0 m
	Syntethic granulates <u>S</u> 40 mm 50 mm 60 mm 70 mm <u>h</u> ~> 1,2...1,3 m ~> 1,5...1,7 m ~> 1,8...2,0 m ~> 2,1...2,5 m Note. For accurate values, see manufacturer's instructions.	




FINNO

ASENNUSOHJE
MONTERINGSANSVISNING
INSTALLATION INSTRUCTION
AUFBAUANLEITUNG
NOTICE D'INSTALLATION


DATE: 9.5.2018





Q12451

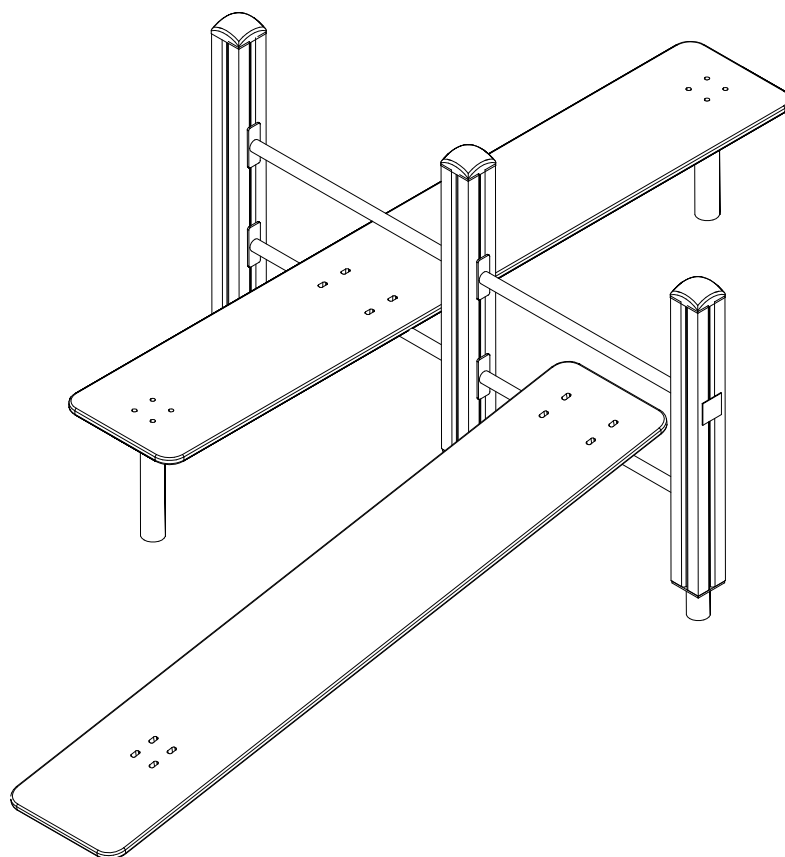



9.5.2018



Copyright Lappset Group Ltd


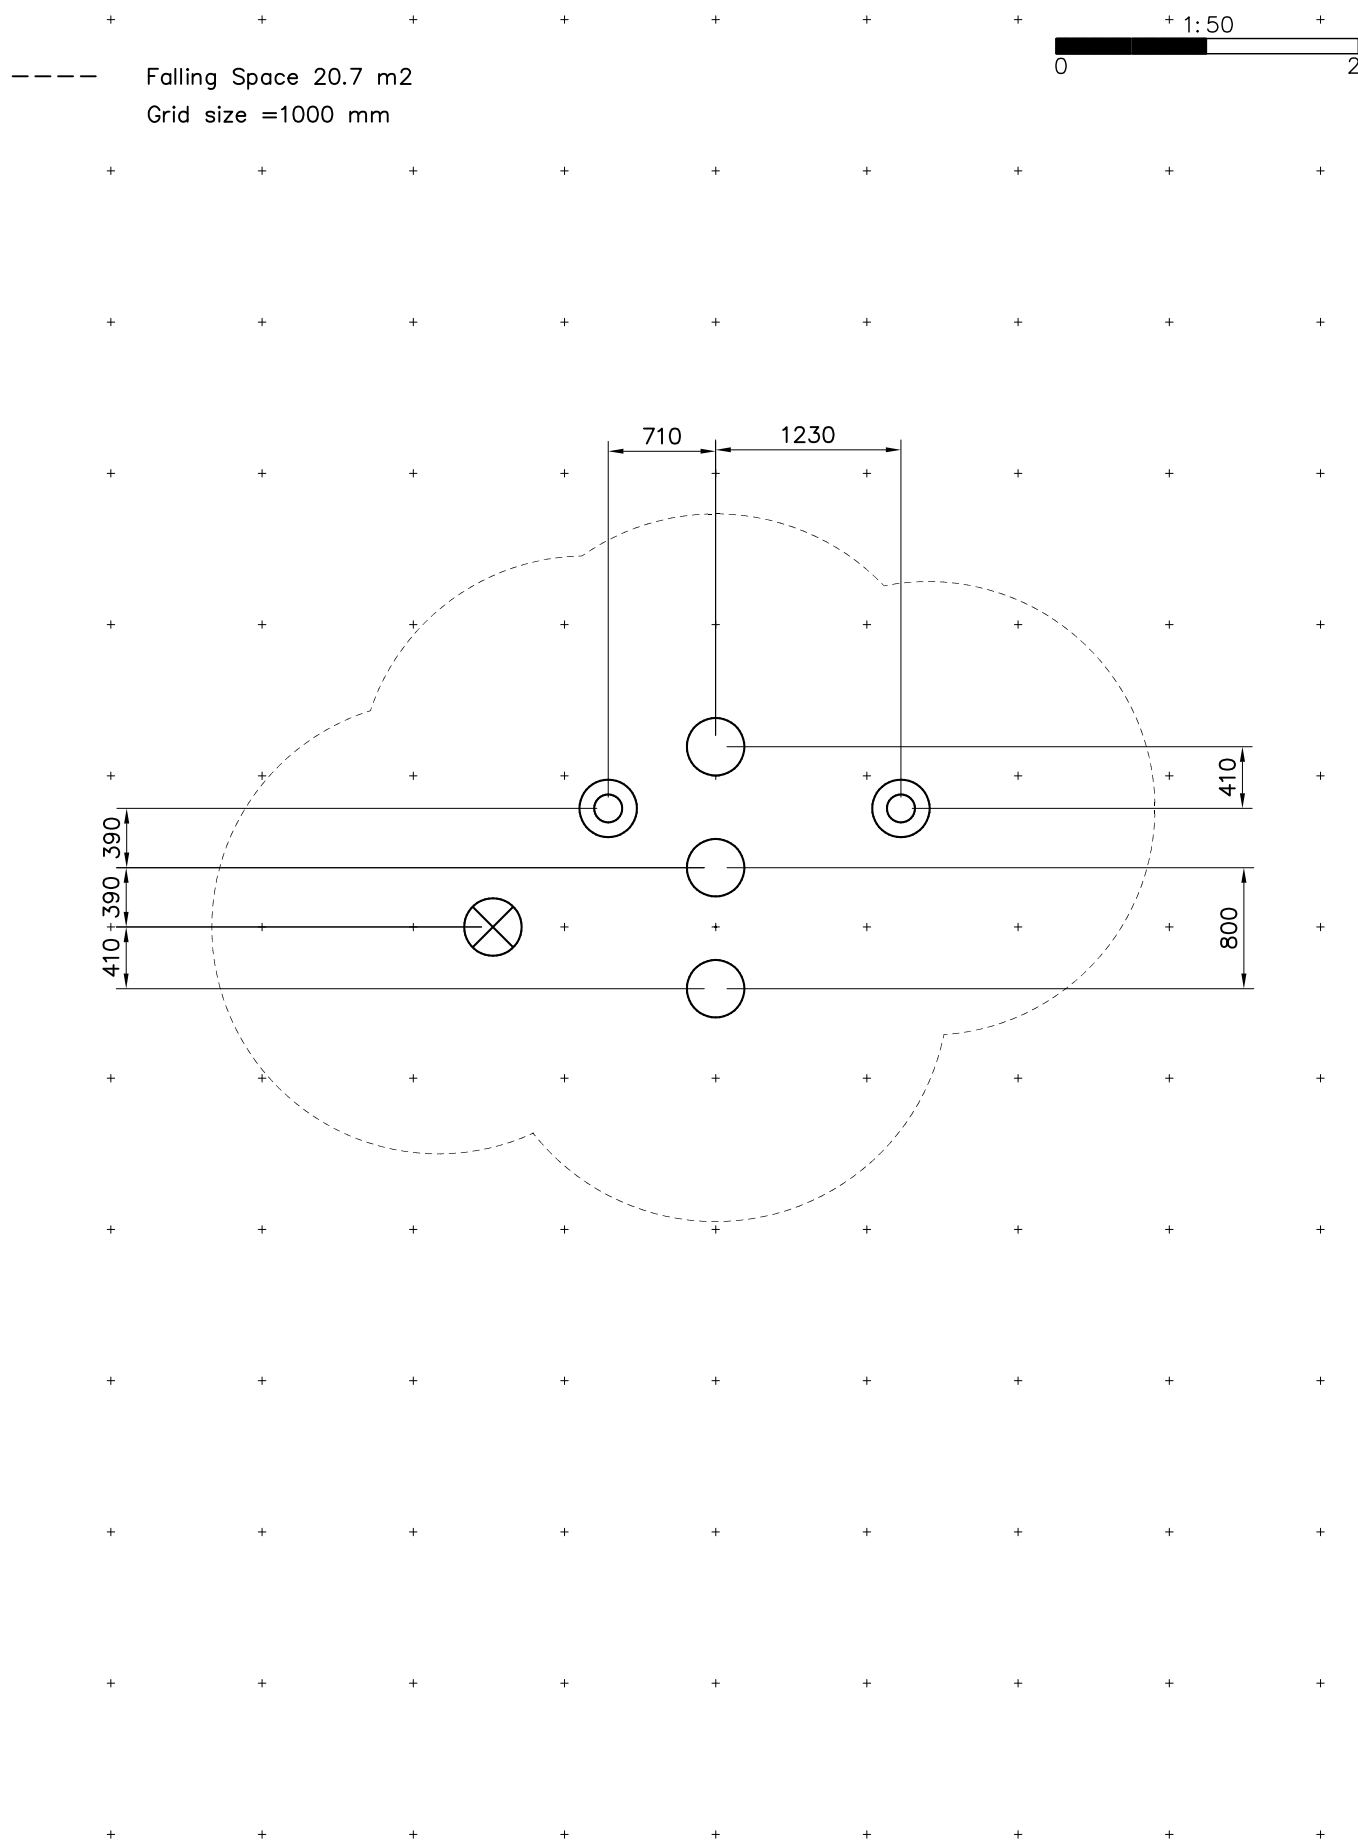







		
		



----- Falling Space 20.7 m²
Max Falling Height 450 mm

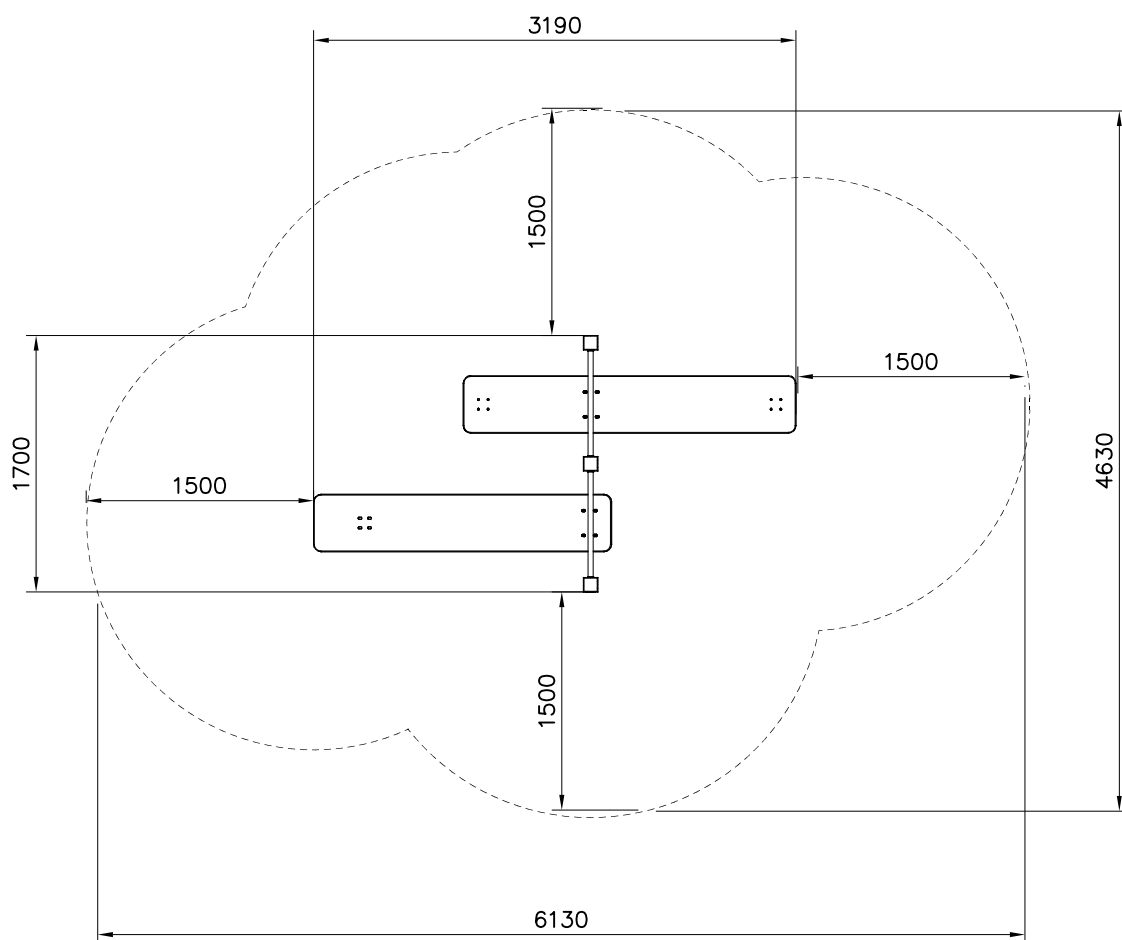


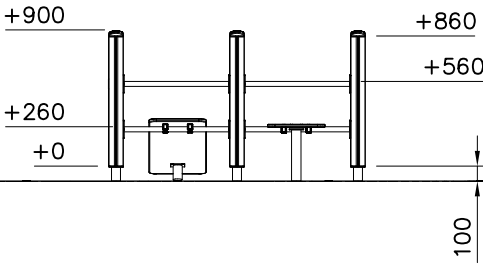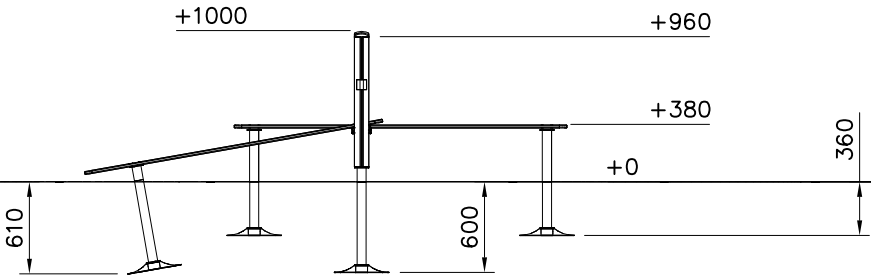


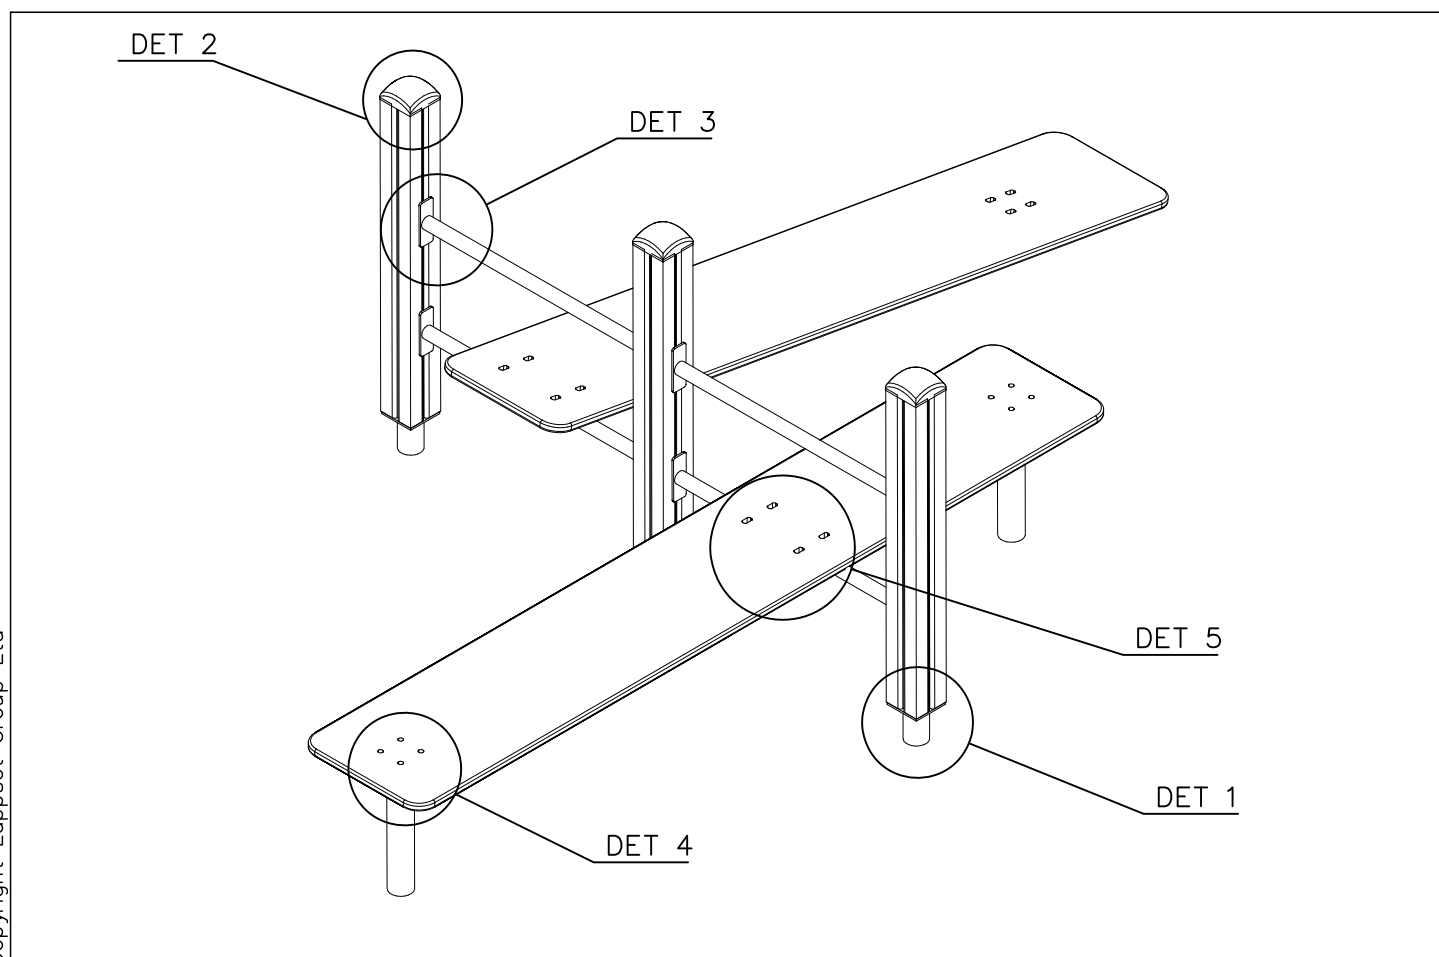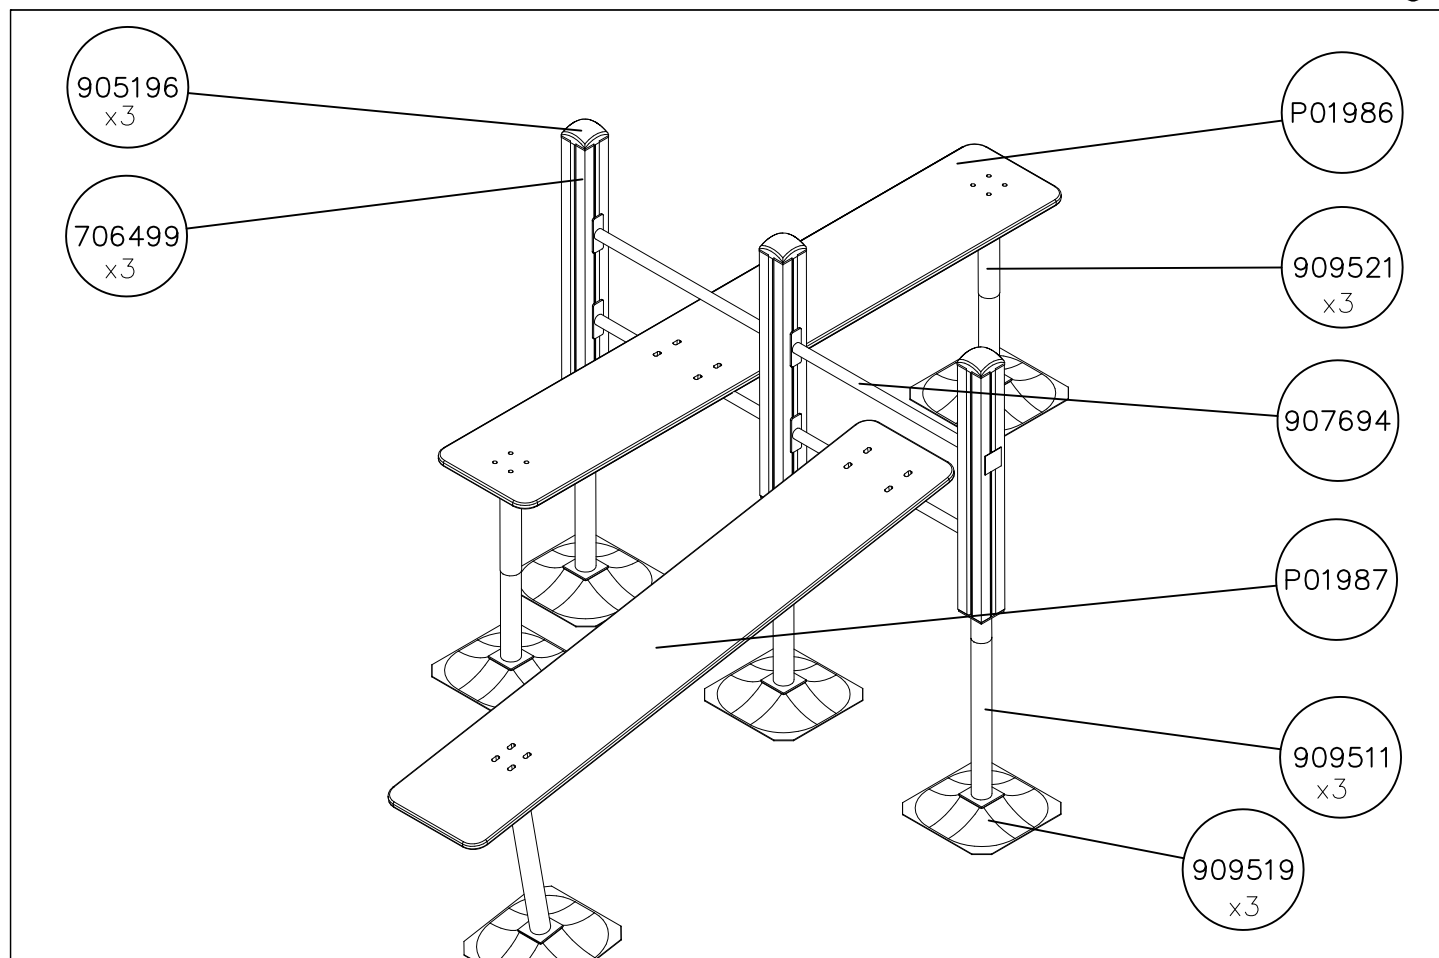


DET 1 	DET 2 	DET 3 	DET 4 
DET 5 			

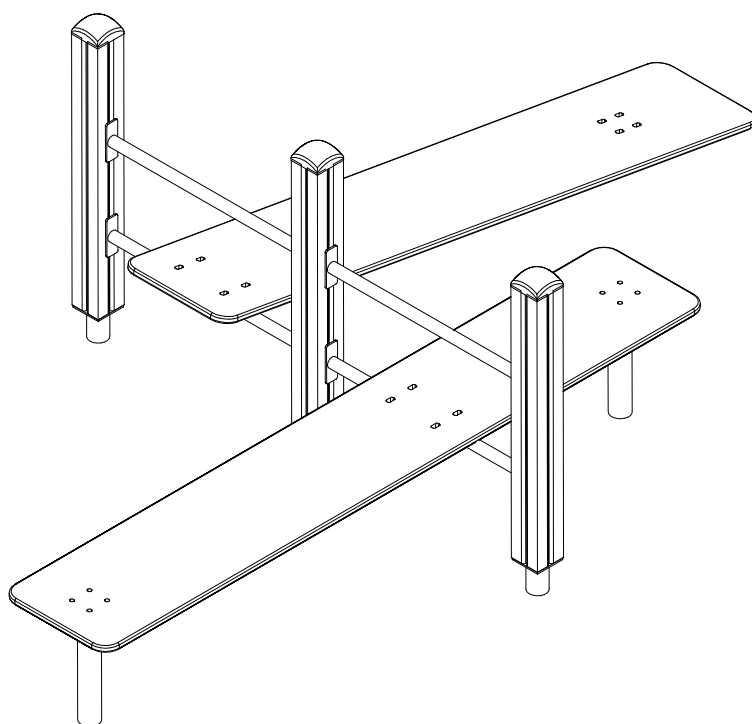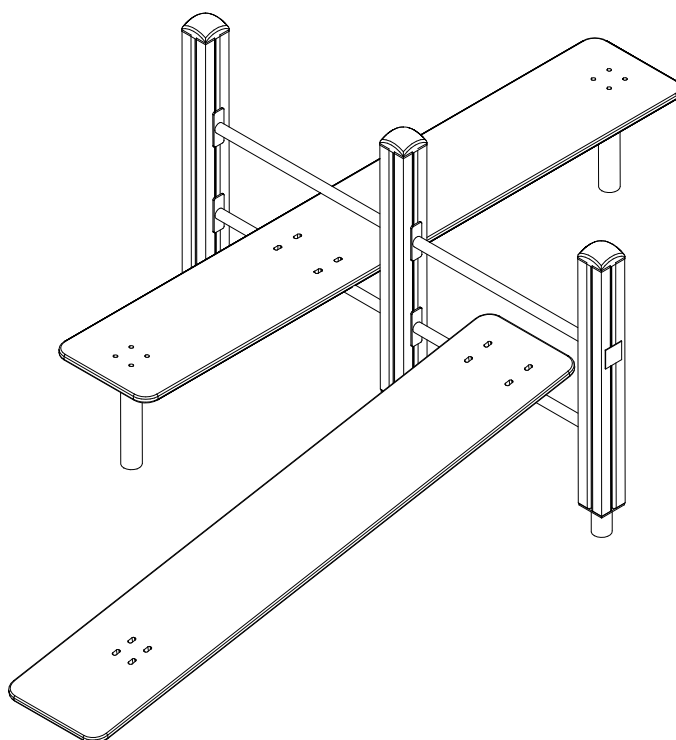


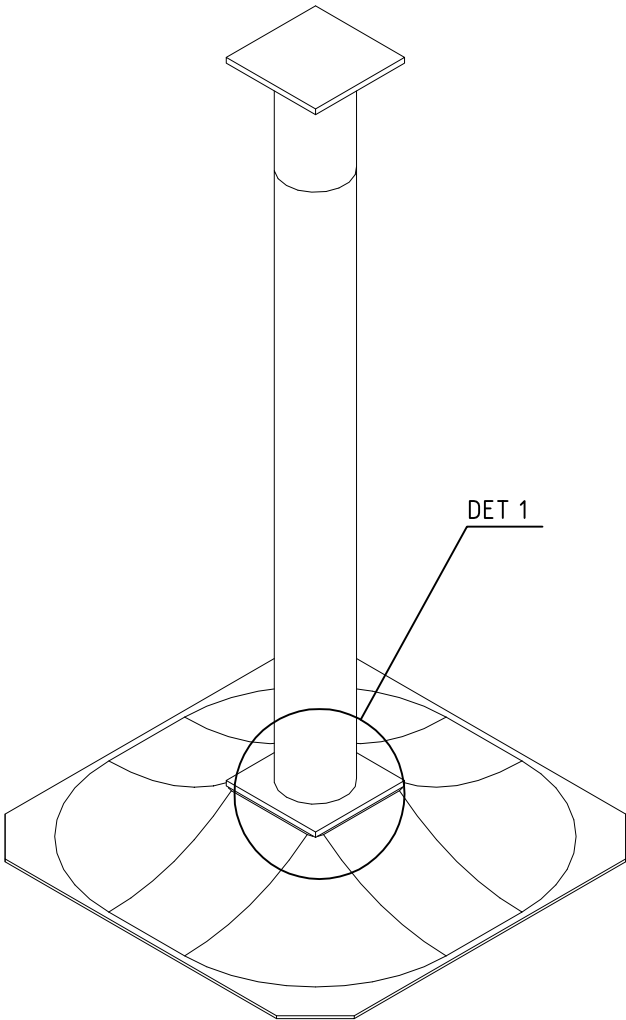

① 909511	PCS	② 909519	PCS
	1		1
③ 909637	PCS	④ 909638	PCS
	4		8
M10		Ø20/10.5	
⑤ 909639	PCS		PCS
	4		
M10x25			
	PCS		PCS
	PCS		PCS
	PCS		PCS
	PCS		PCS
	PCS		PCS

DET 1

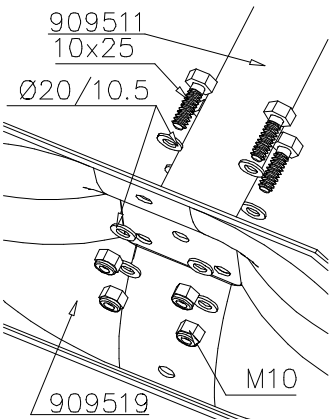

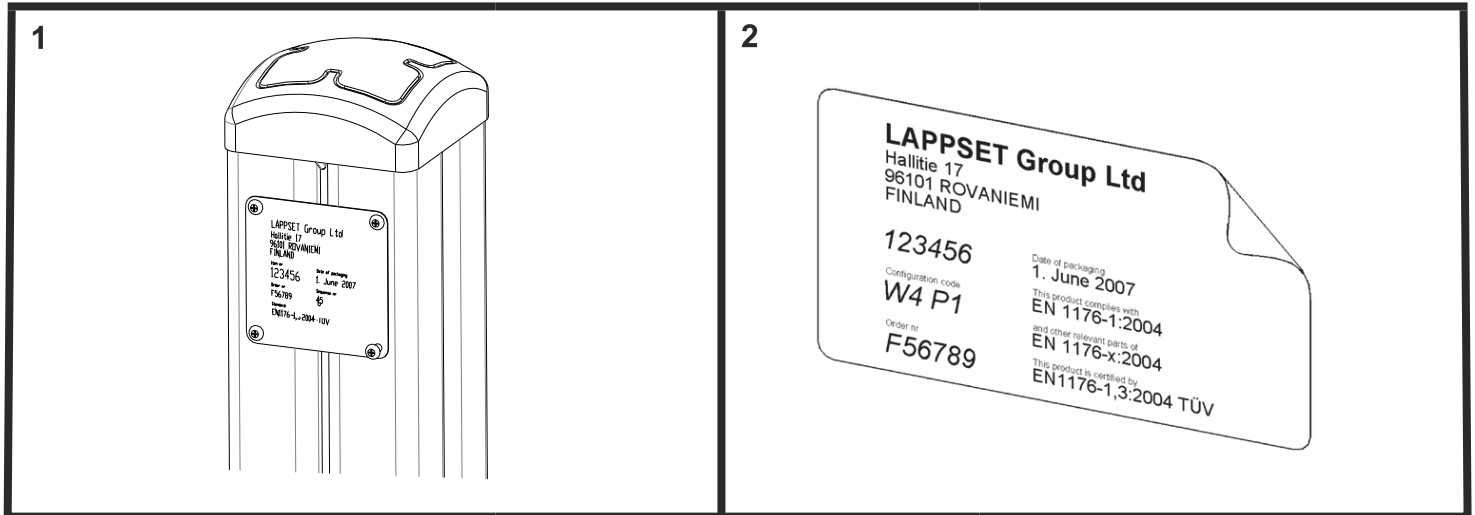

Tuotekyltti tulee tuotteen mukana yhdellä seuraavista tavoista:

1) Metallinen tuotekyltti ja kiinnitysruuvit

- Kiinnitä tuotekyltti ruuveilla tolppaan noin 2 metrin korkeuteen kuvan 1 mukaisesti.

2) Tuotekyltitarra

- Puhdista maalattu metalli- tai vaneripinta pölystä ja kosteudesta. Liimaa tarra kuvan 2 mukaisesti.
- Huom. Älä kiinnitä tarraa karheapintaiseen laminaattiin tai maalattuun puuhun.

Vår produktmärkning levereras på ett av följande sätt:

1) Produktskylt i metall

- Fäst skylten med de medföljande skruvarna

2) Självhäftande produktetikett

- Rengör den pulverlackerade metallytan eller laminatyten så att den blir fri från smuts och fukt. Fäst etiketten enligt fig. 2.
- Obs! Fäst ej etiketten på detaljer med skrovlig yta eller på målat trä.

Product label is delivered by one of following ways:

1) Metal product label and screws

- Fasten the label with screws.

2) Label sticker

- Clean the painted metal or plywood surface from dirt and moisture. Fasten the sticker as shown in the figure 2.
- Note. Do not attach the sticker to rough surfaced laminate or painted wood.

La plaque d'informations produit est livrée sous l'une de ces 3 formes :

1) Plaque métallique et vis

- Fixez la plaque à l'aide des vis.

2) Etiquette autocollante

- Avant de coller l'étiquette, nettoyez le composant métallique peint ou la plaque de contreplaqué, de toute saleté. La surface doit être sèche (voir image 2).
- Attention, ne pas coller l'étiquette sur une surface lamellé-collée irrégulière ou sur du bois peint.


Die Auslieferung des Produktaufklebers erfolgt auf eine dieser Arten:

1) Produkt-Schild aus Metall incl. Schrauben

- Die Befestigung des Schildes erfolgt mittels der Schrauben.

2) Aufkleber


- Entfernen Sie zunächst Schmutz und Feuchtigkeit vom lackierten Metall bzw. von der Holzoberfläche und bringen Sie den Aufkleber wie im Bild oben rechts beschrieben auf den gesäuberten Untergrund auf.
- Beachten Sie: Bringen Sie den Aufkleber nicht auf raues laminiertes oder lackiertes Holz an.

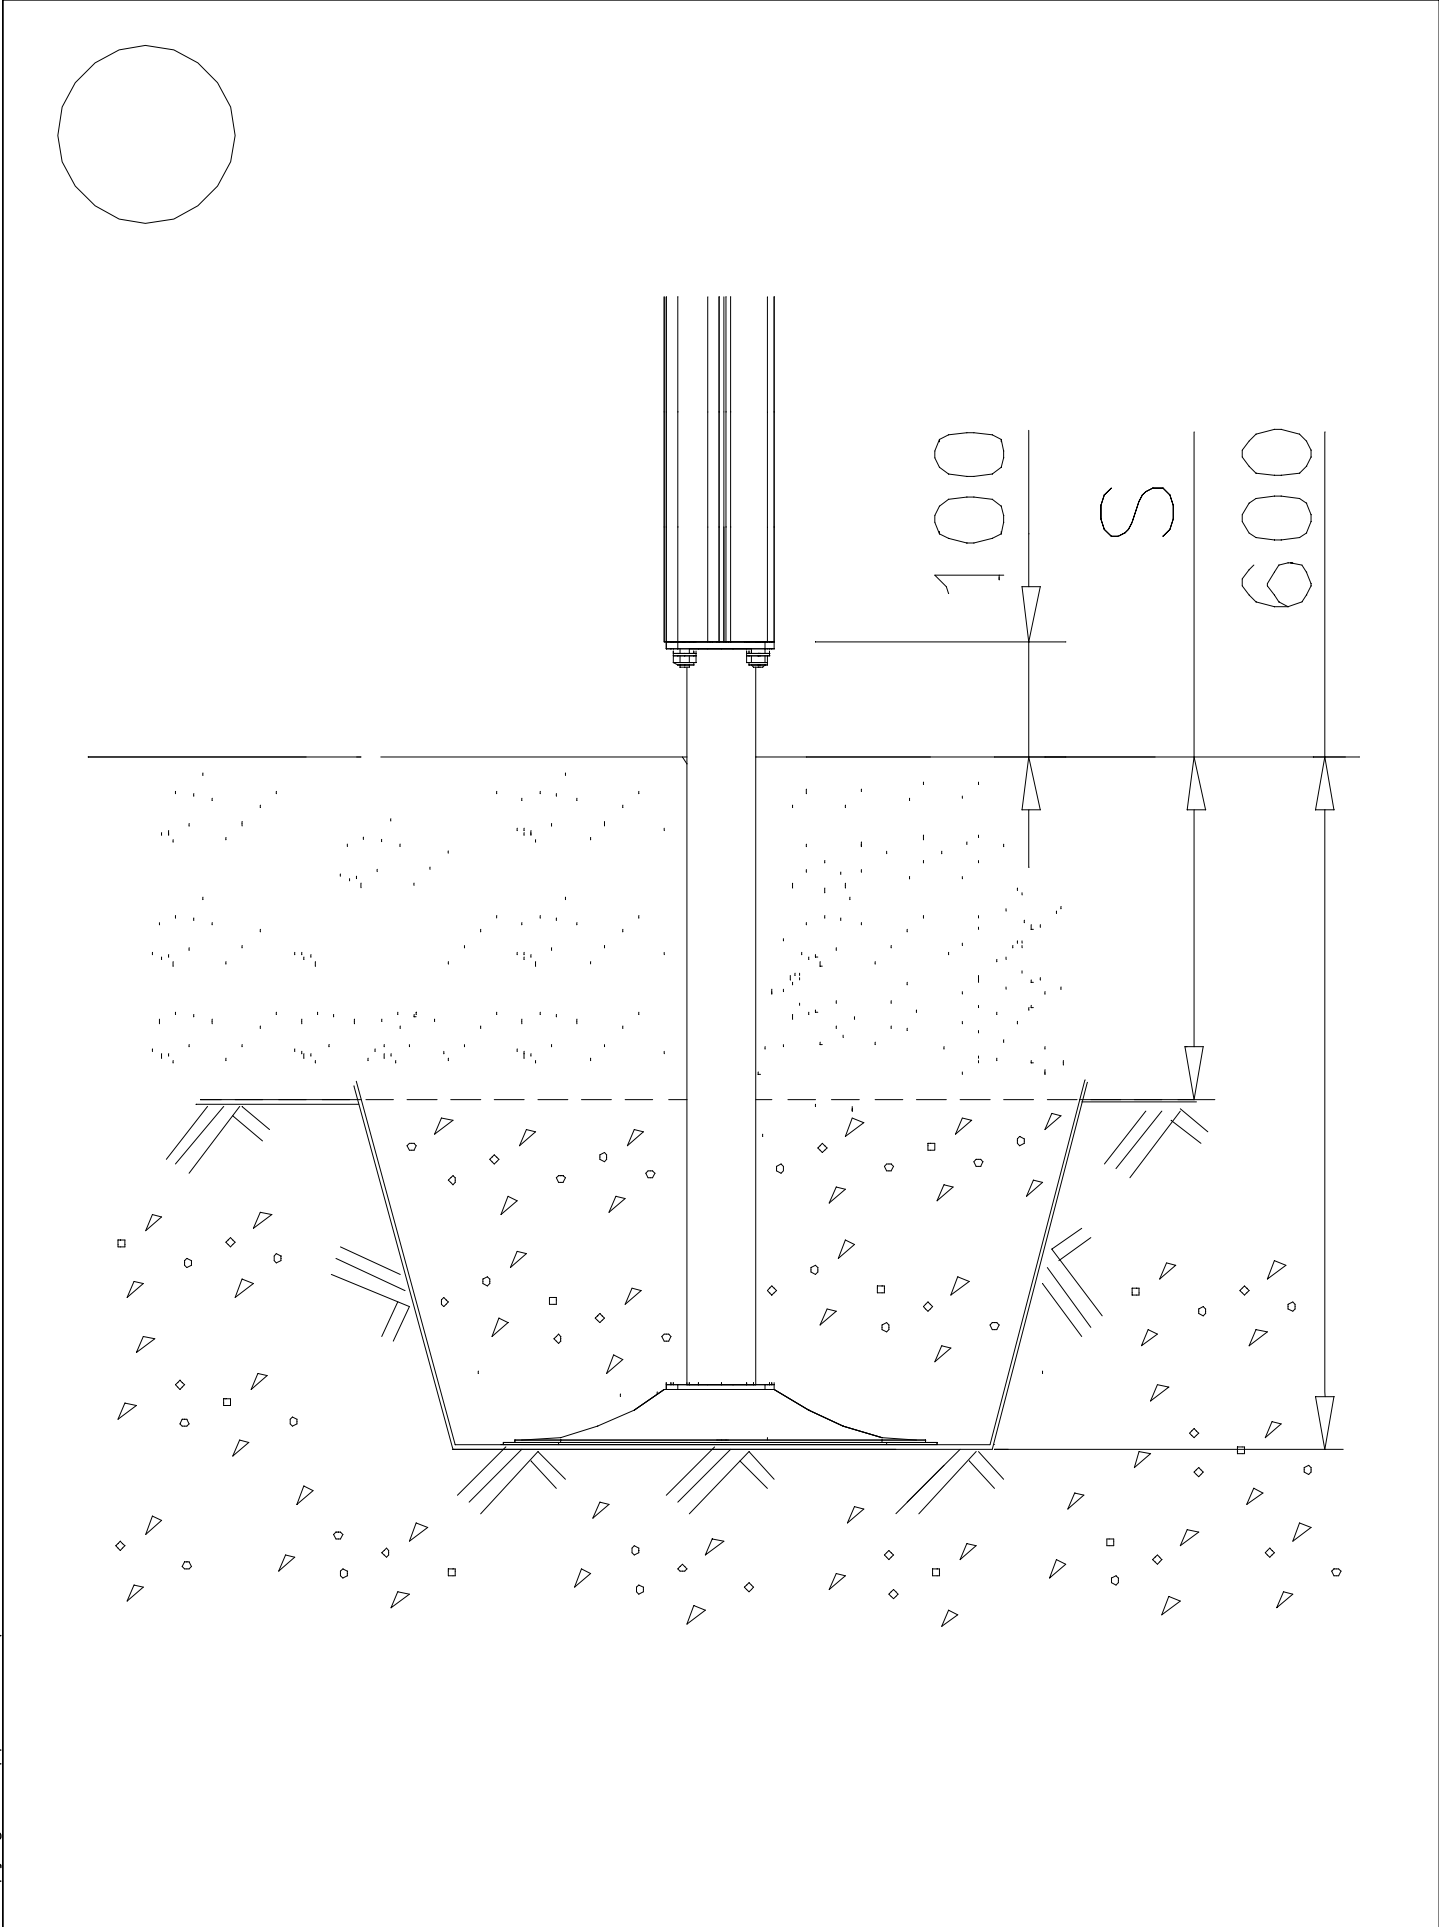


 LAPPSET®
BETON FOUNDATION

FOOT
DATE: 27.10.2015

1(1)

② 905104  M10	PCS		PCS
	4		
	PCS		PCS

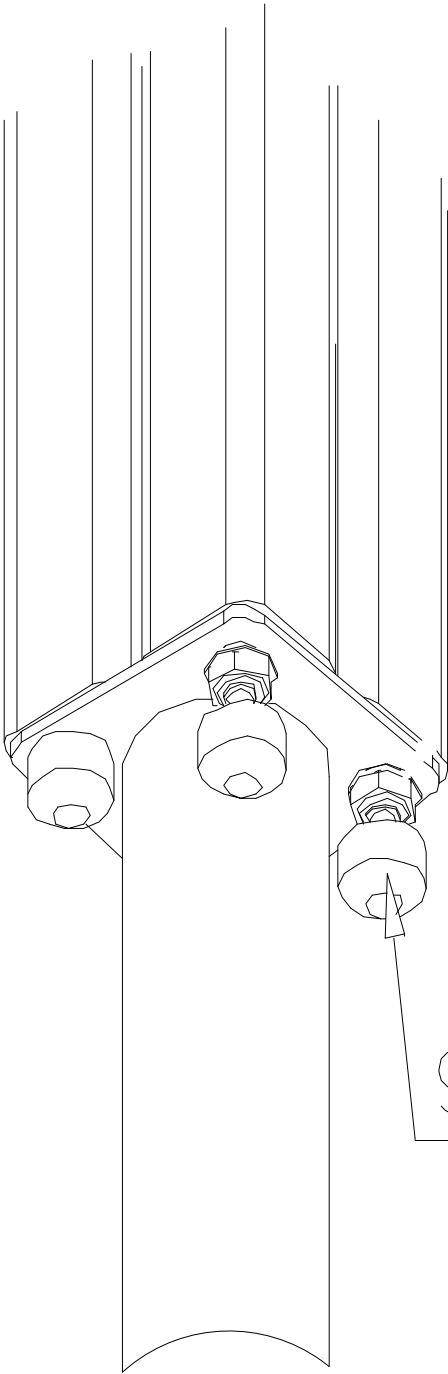


905104

LAPPSET®
DEEP FOUNDATION

FOOT

DATE: 15.5.2018

1(1)

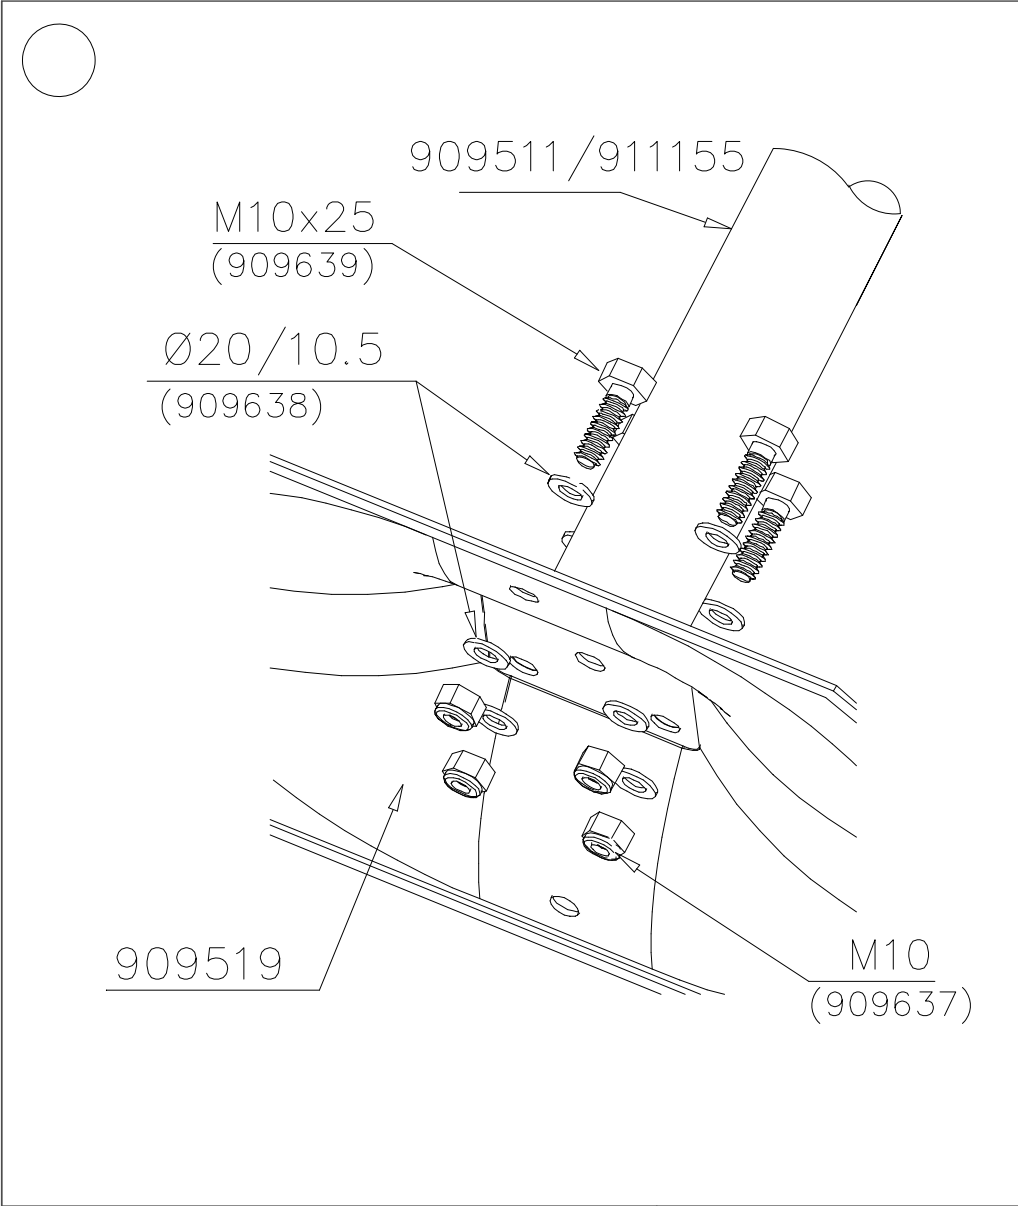

① 909511	PCS	② 909519	PCS
	1		1
90x90x650		50x380x380	
③ 909637	PCS	④ 909638	PCS
	4		8
M10		Ø20/10.5	
⑤ 909639	PCS	⑥ 905104	PCS
	4		4
M10x25		M10	
OPTION FOOT			
① 911155	PCS		PCS
	1		
90x90x650			