

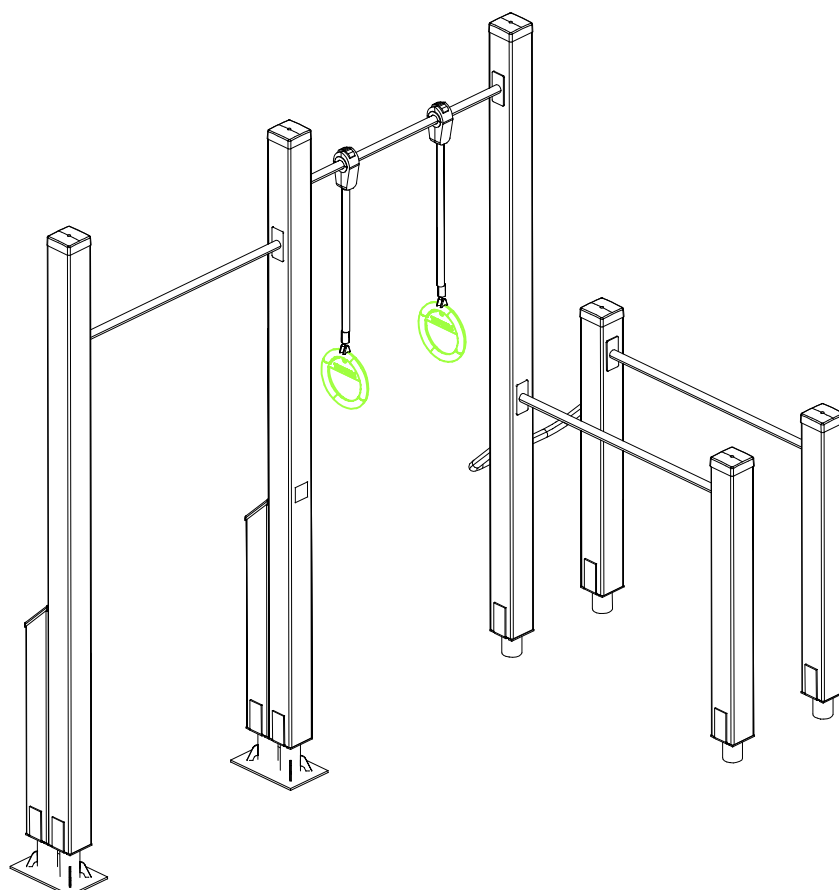




















FITNESS

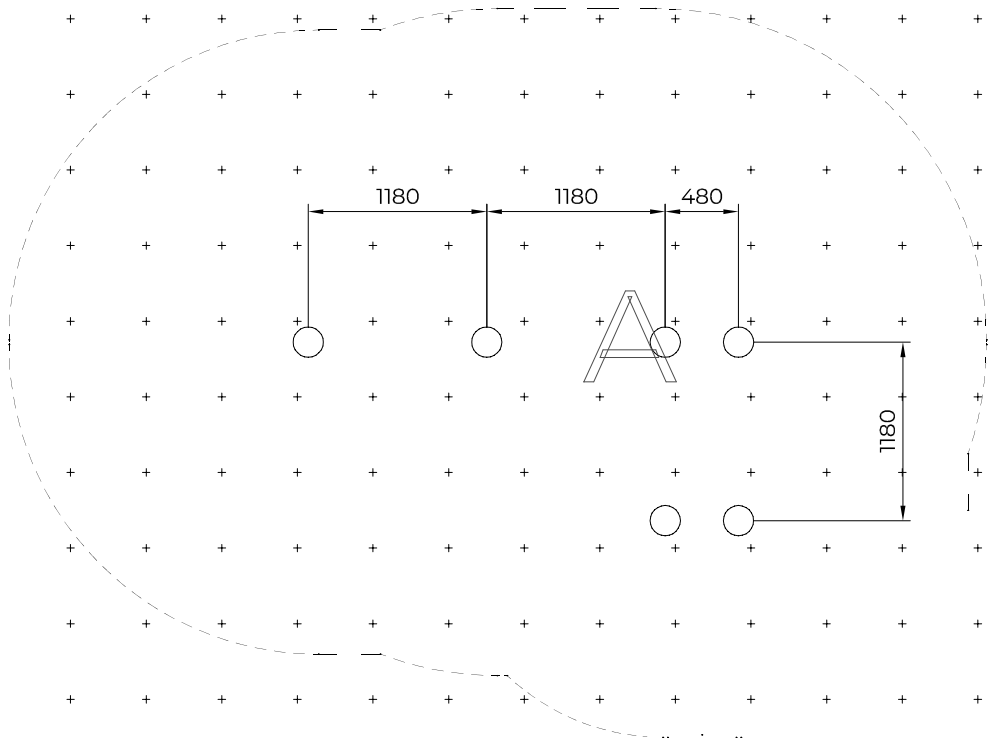

ASENNUSOHJE MONTERINGSANSVISNING INSTALLATION INSTRUCTION AUFBAUANLEITUNG NOTICE D'INSTALLATION

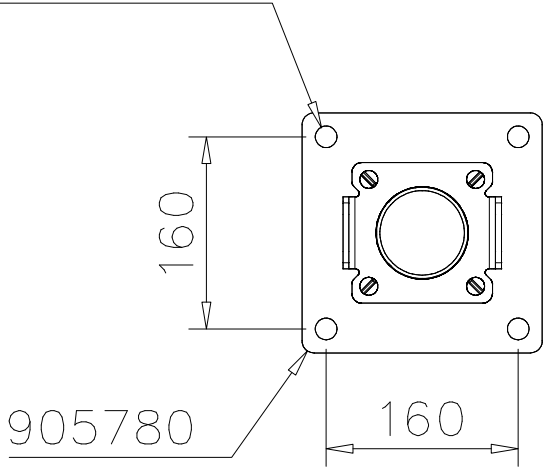
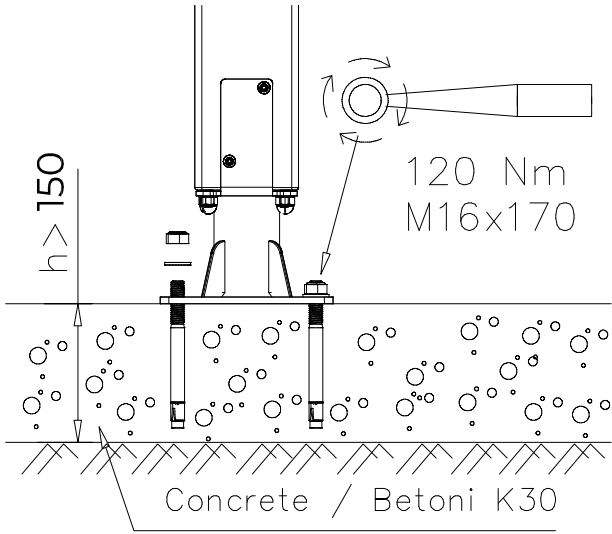
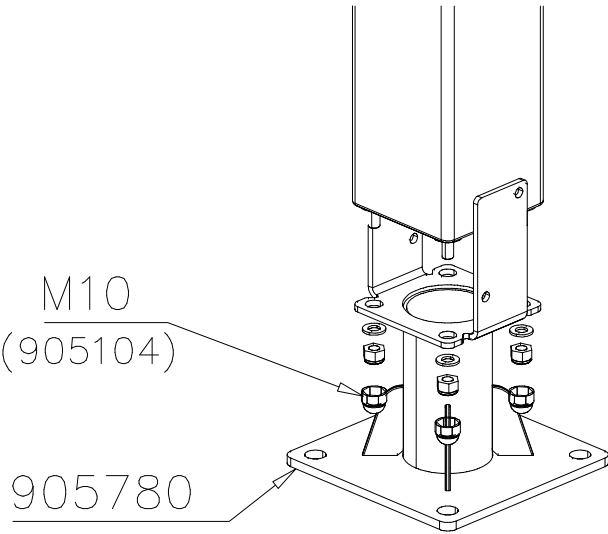
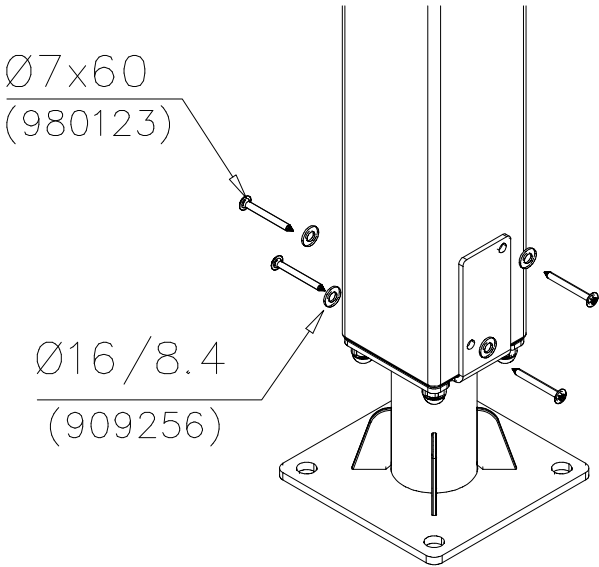
DATE: 9.9.2025

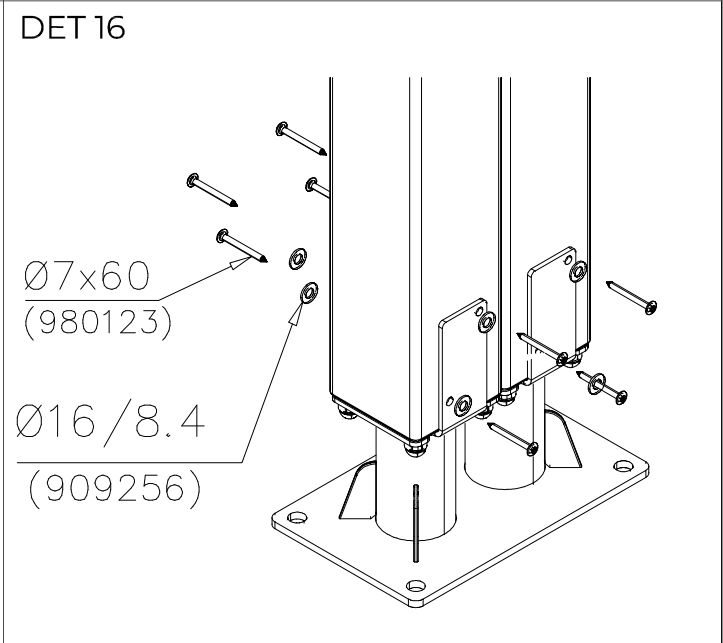
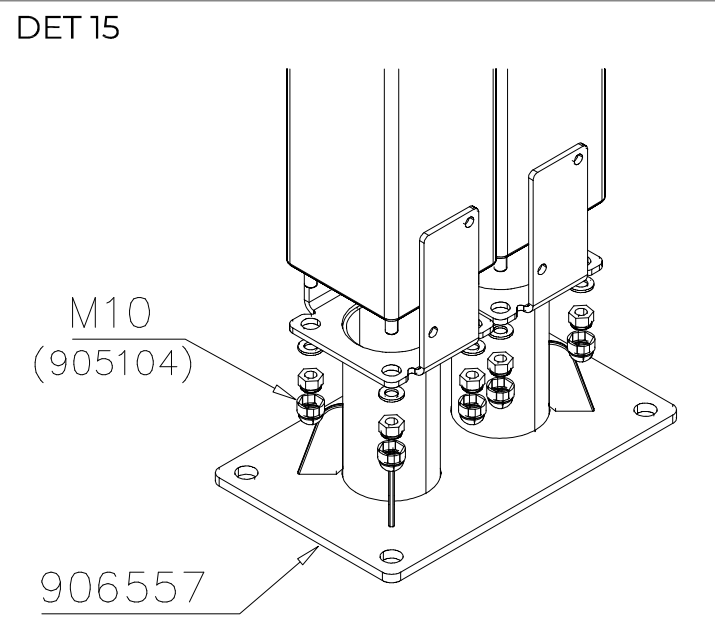
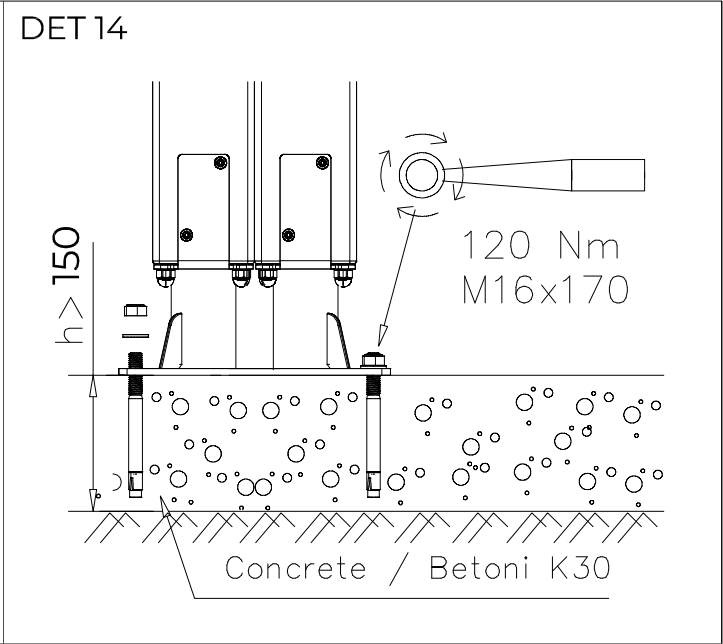
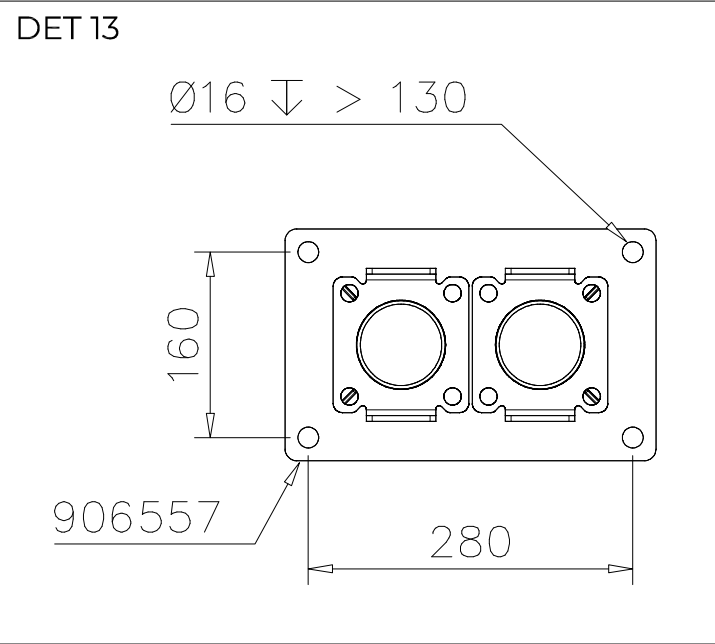
Q14349-2

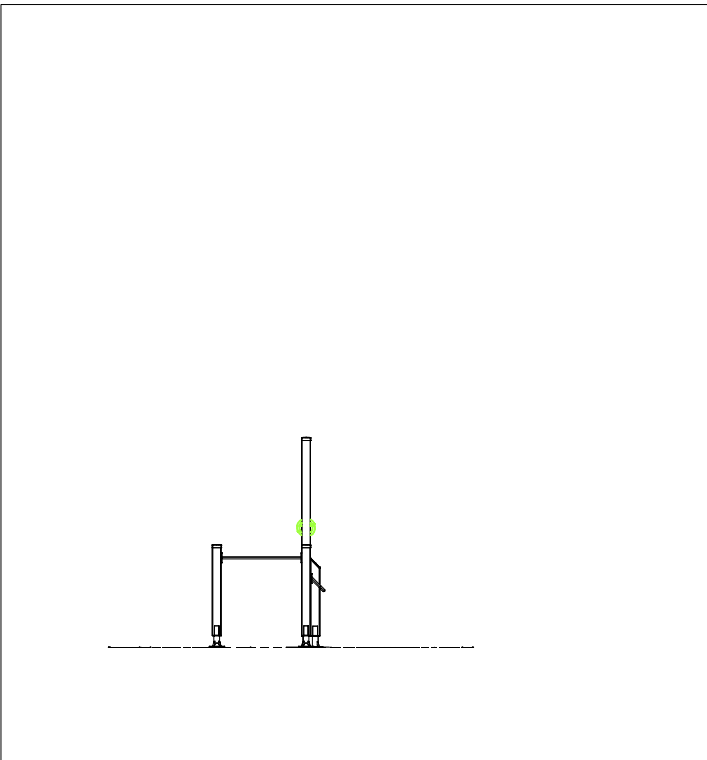
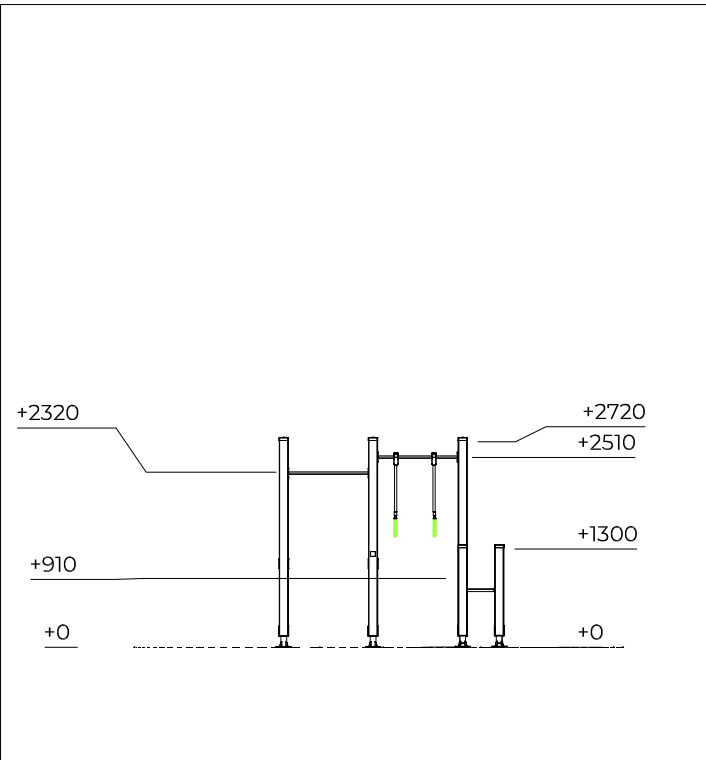
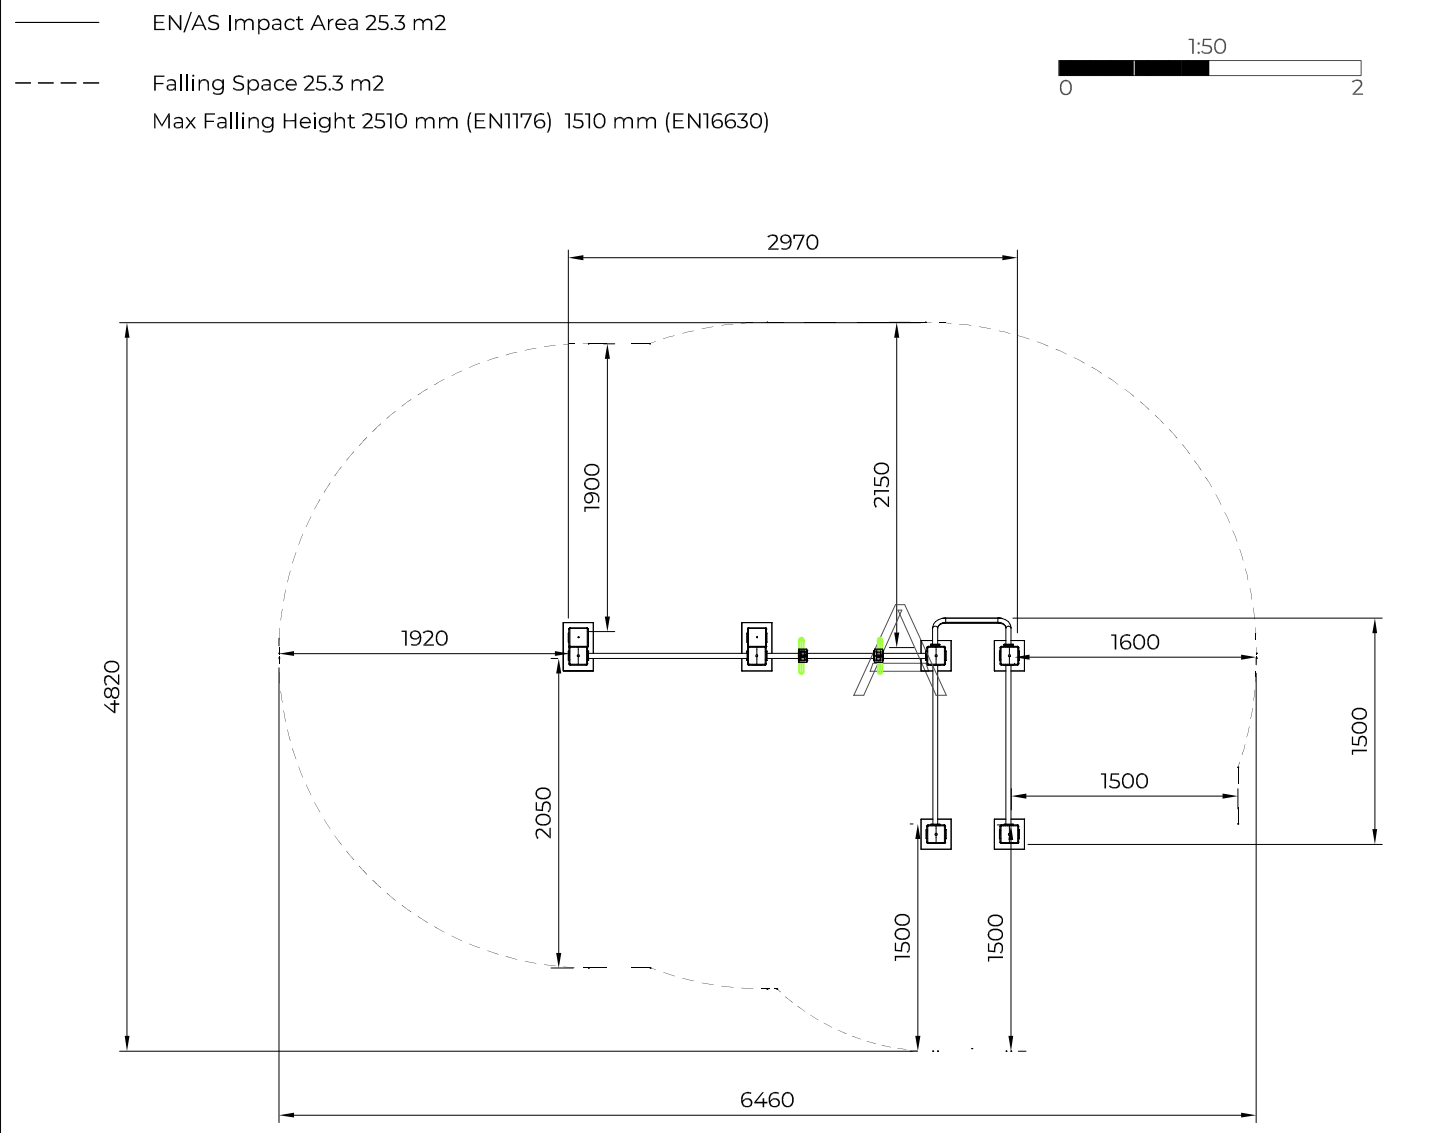


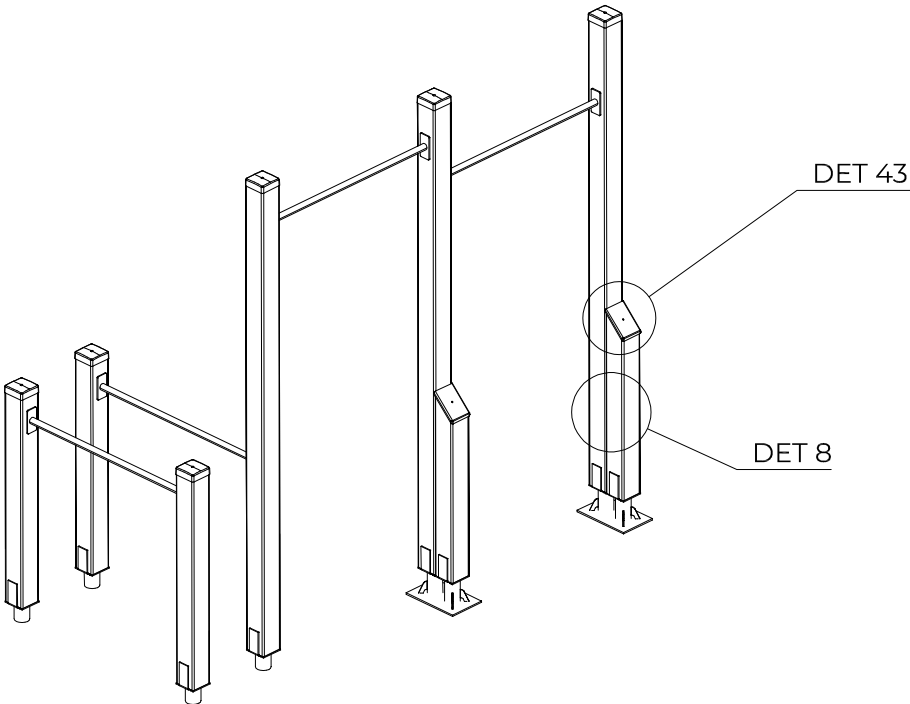
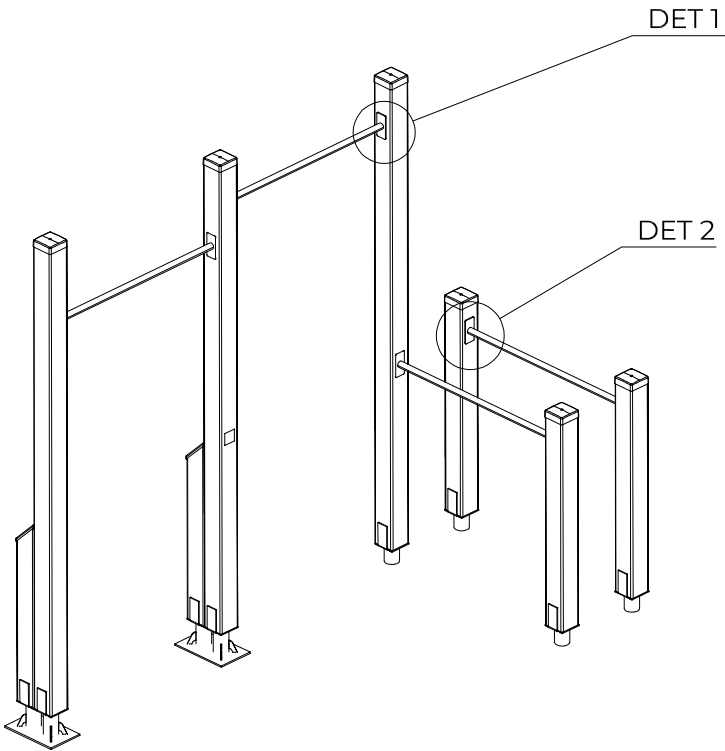
702286  65x65	PCS 1	705018  118x118x1170	PCS 3	705037  118x118x2590	PCS 3	705335  118x118x1000	PCS 2	707881  118x78	PCS 1	900240  Ø8x70	PCS 8
902195  150x50x50	PCS 4	902232  M10x55	PCS 2	902233  M10x30	PCS 2	904450  M16x170	PCS 24	905103  PT-28/32-H	PCS 6	905104  M10	PCS 16
905780  120x120x150	PCS 4	905830  123x123x40	PCS 6	905838-216  L 1060	PCS 4	905934-216 	PCS 1	906006  Ø64/36,4x59	PCS 4	906557  240x120x150	PCS 2
906583  129x181x14x3	PCS 2	909246  M12x140	PCS 6	909256  Ø16/8.4x1.6	PCS 60	980100  Ø5x60	PCS 2	980104  Ø5x90	PCS 6	980114  Ø4x20	PCS 8
980123  Ø7x60	PCS 64	980154  Ø24/13	PCS 6	980161  M10	PCS 4	705039  Ø16x974	PCS 2		PCS		PCS
	PCS		PCS		PCS		PCS		PCS		PCS
	PCS		PCS		PCS		PCS		PCS		PCS



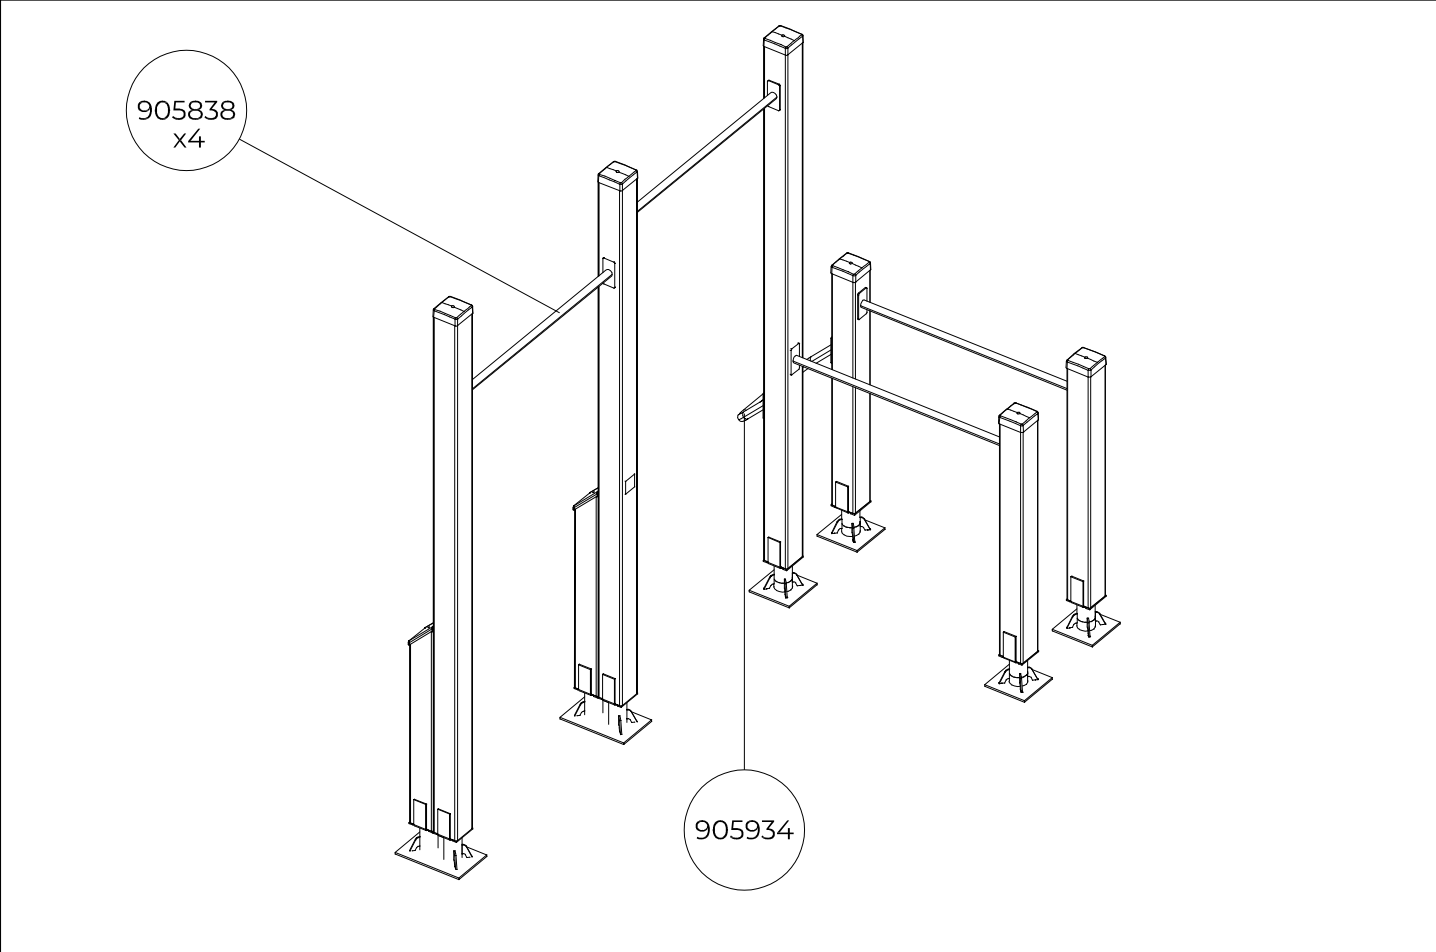
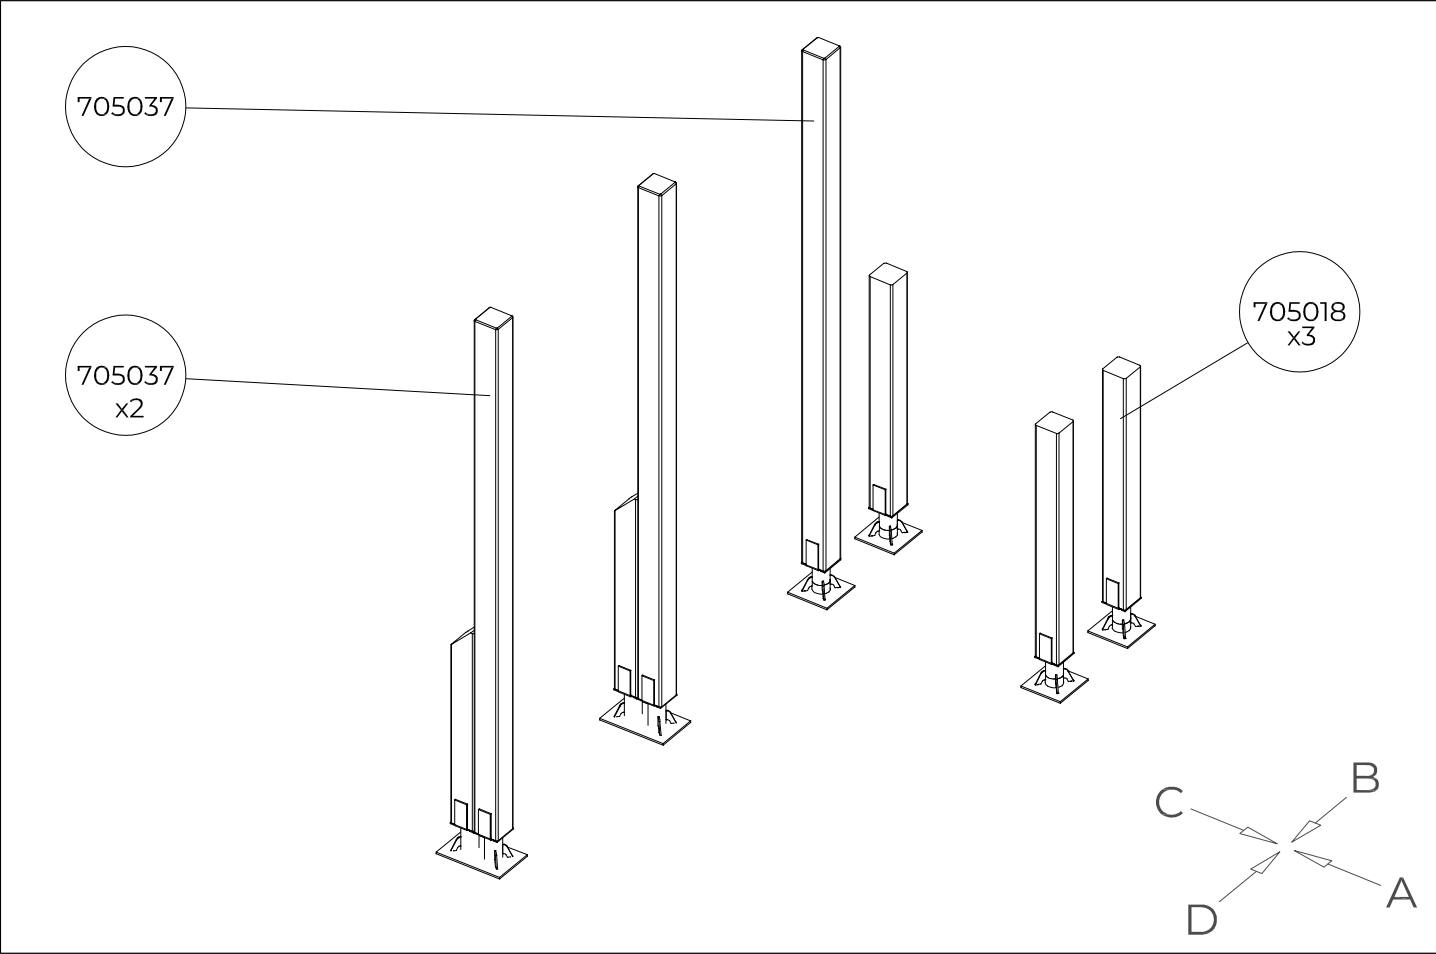
DET 1 $\varnothing 16 \downarrow > 130$  160 160 905780	DET 2  $h > 150$ 120 Nm M16x170 Concrete / Betoni K30
DET 3  M10 (905104) 905780	DET 4  $\varnothing 7 \times 60$ (980123) $\varnothing 16 / 8.4$ (909256)
DET 5	DET 6

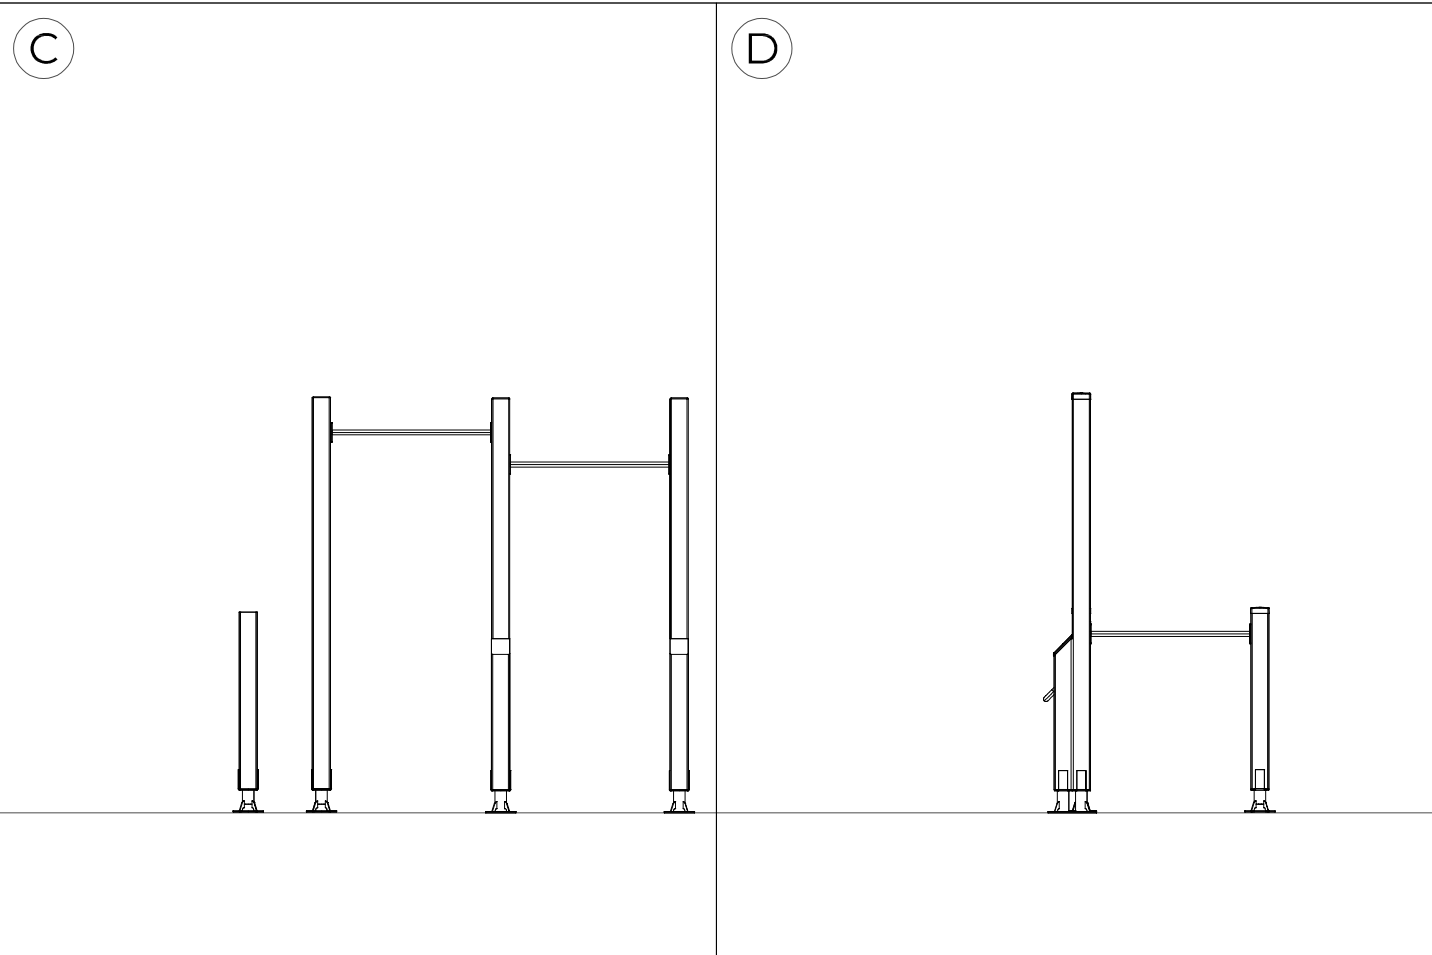
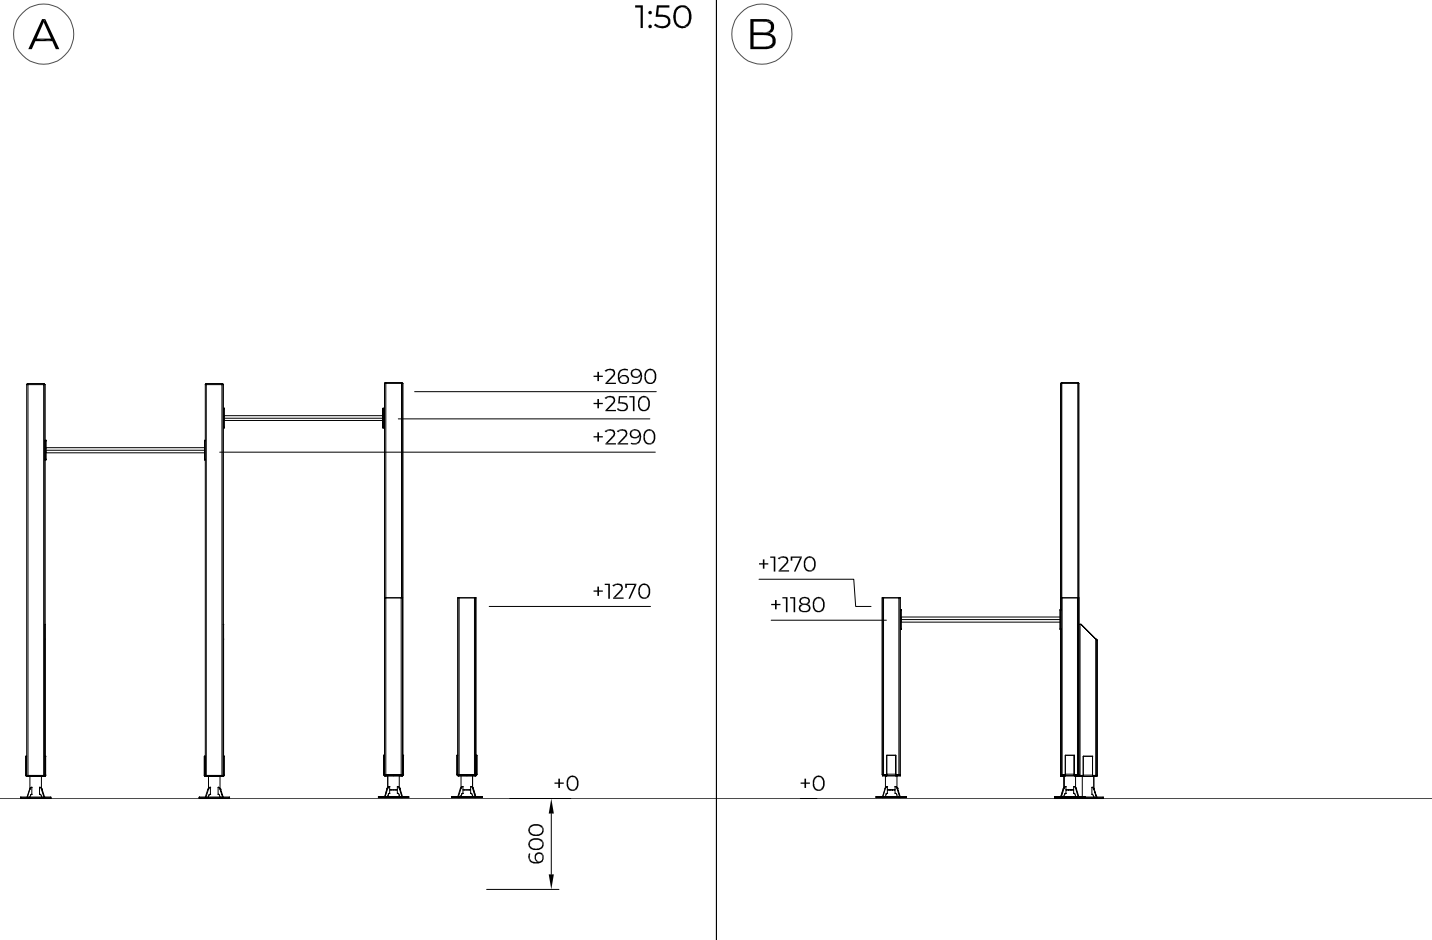


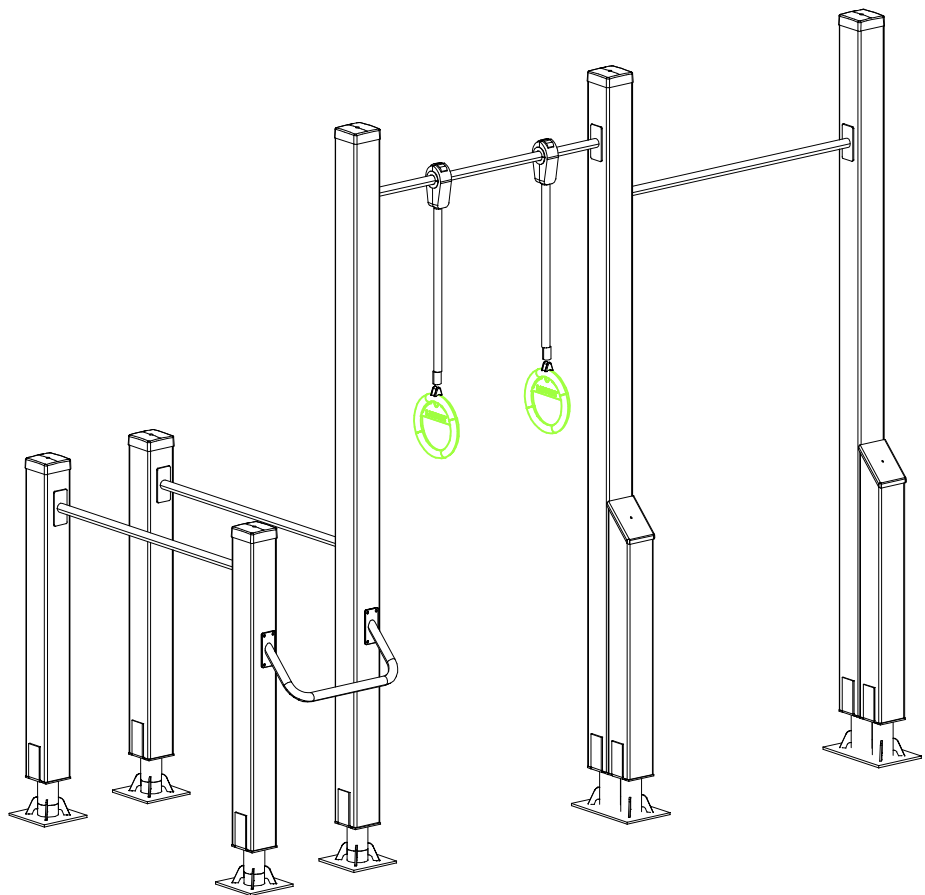
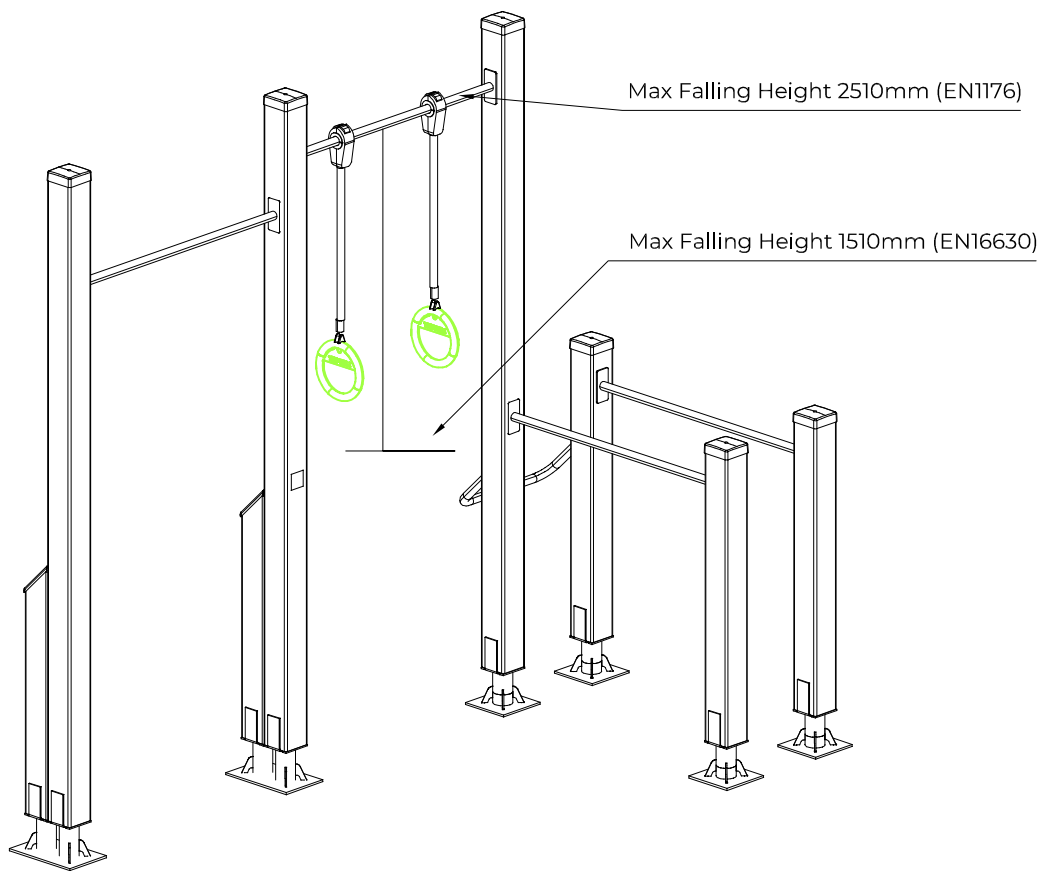






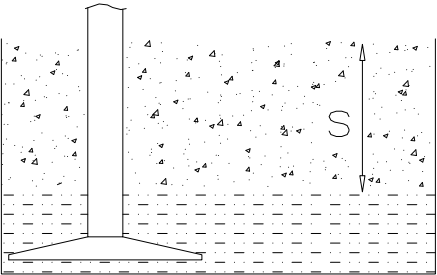
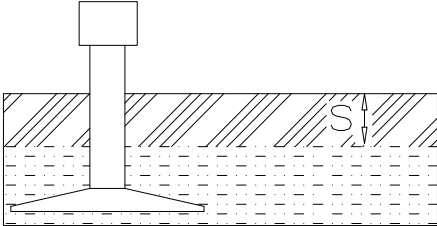


DET 1 $\frac{\text{Ø16 / 8.4}}{(909256)}$ $\frac{\text{Ø7 x 60}}{(980123)}$	DET 16 $\frac{\text{Ø5 x 90}}{(980104)}$ 905830 Place the logo laterally
DET 8 $\frac{\text{Ø24 / 13}}{(980154)}$ $\frac{\text{M12 X 140}}{(909246)}$ 905103	DET 43 $\frac{\text{Ø5 x 60}}{(980100)}$ 906583

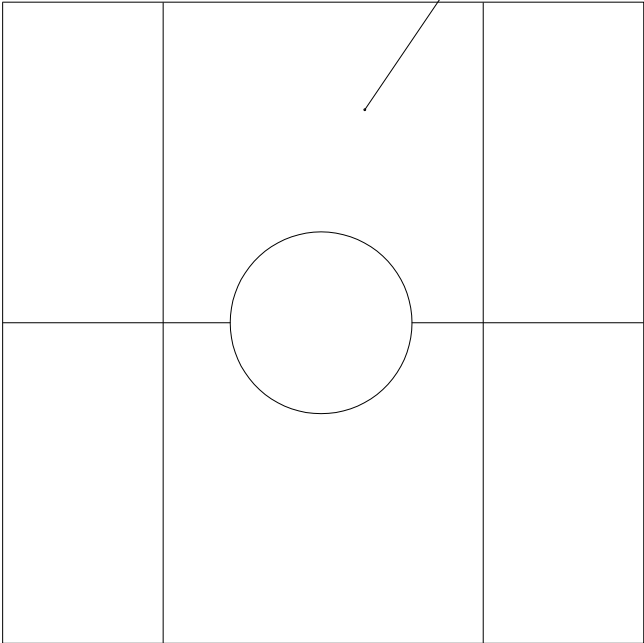




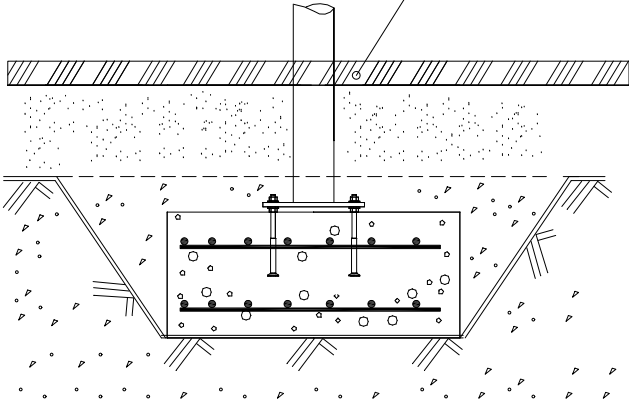




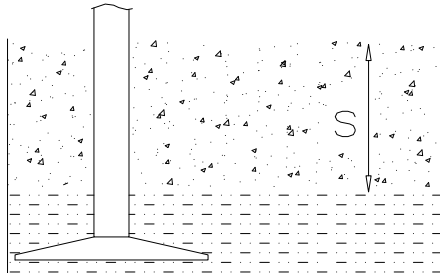
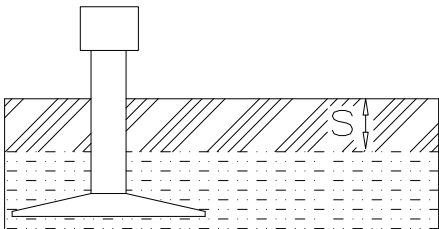
		
h < 600 Without movement and therefore without Impact Area	Totally hard surfaces.	E.g. concrete or asphalt 
h < 600 With movement e.g. rocking	Materials with very limited impact attenuating properties.	E.g. wood 
h < 1000	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  grass  unsorted sand 
h < 3000	Loose fill material E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm	 $\underline{S}$ 30 cm $\underline{h}$ < 2,0 m 40 cm < 3,0 m
	Syntethic granulates $\underline{S}$ 40 mm ~> 1,2...1,3 m 50 mm ~> 1,5...1,7 m 60 mm ~> 1,8...2,0 m 70 mm ~> 2,1...2,5 m Note. For accurate values, see manufacturer's instructions.	


REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

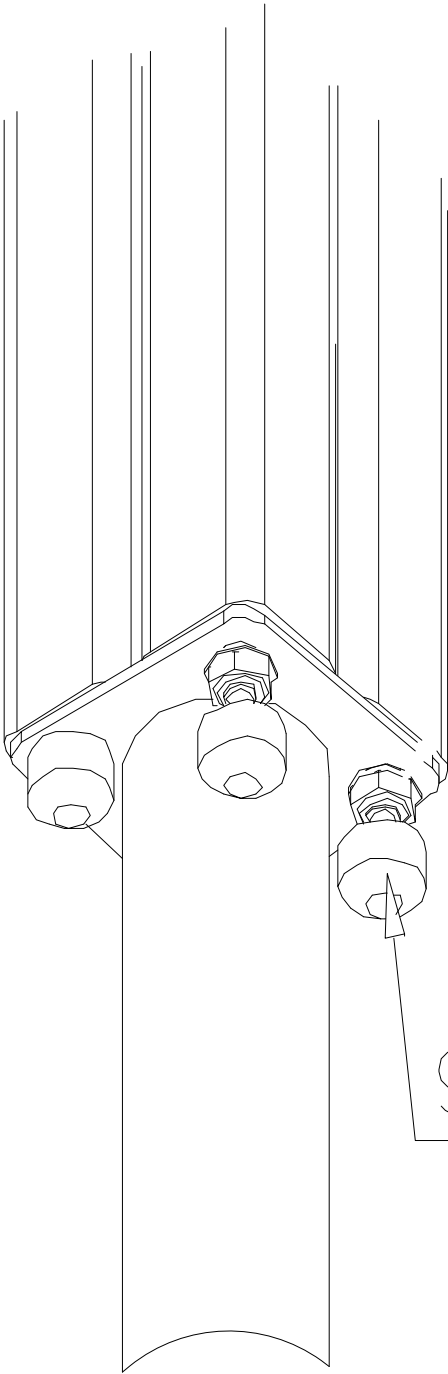


REMOVE SAFETY SURFACE/SAND/GRAVEL
TO CHECK FOUNDATION

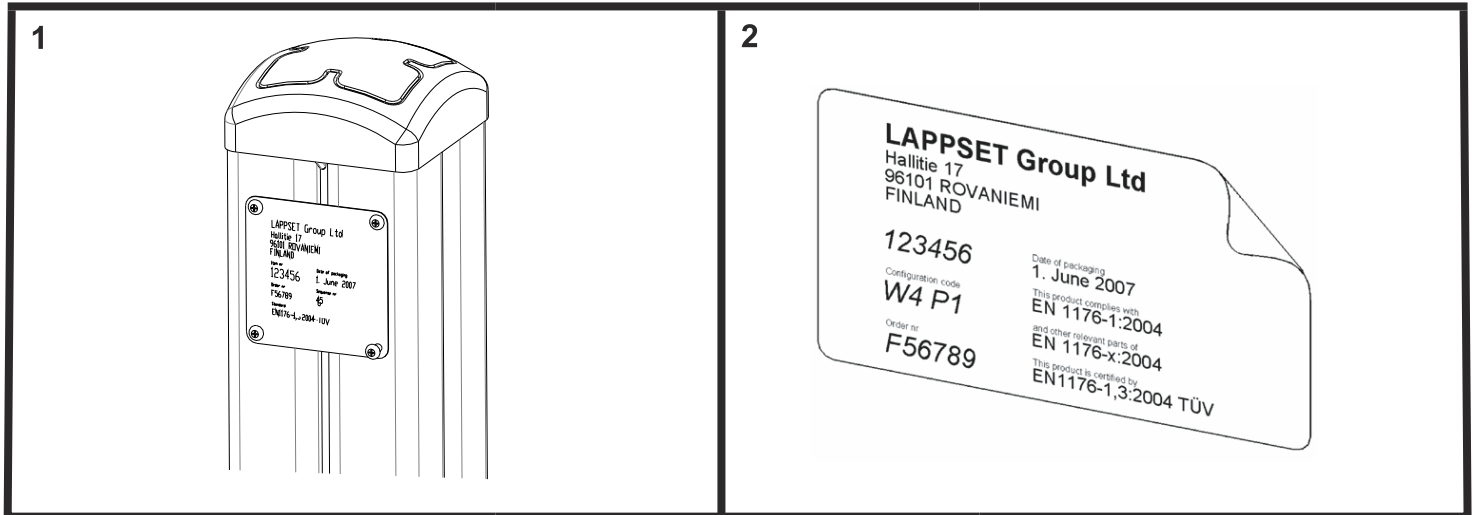


												
h < 1000	Totally hard surfaces or materials with very limited impact attenuating properties. Case by case risk assessment is needed including e.g. evaluation whether there is forced movement, what is the intended exercise and where will the product be installed.	Totally hard surfaces. E.g. concrete or asphalt  Materials with very limited impact attenuating properties. E.g. wood 										
h < 1200	Materials with significant impact attenuating properties.	fine gravel 0–8 mm  Unsorted sand/ topsoil 										
h < 1500		Lawn 										
h < 3000	Loose fill material E.g. sand/gravel 0,25...8 mm D60/D10<3,0 Woodchips 5...30 mm bark 20...80 mm	 <u>S</u> 30 cm 40 cm <u>h</u> < 2,0 m < 3,0 m										
	Syntethic granulates <table><tr><td><u>S</u></td><td><u>h</u></td></tr><tr><td>40 mm ~></td><td>1,2...1,3 m</td></tr><tr><td>50 mm ~></td><td>1,5...1,7 m</td></tr><tr><td>60 mm ~></td><td>1,8...2,0 m</td></tr><tr><td>70 mm ~></td><td>2,1...2,5 m</td></tr></table> Note. For accurate values, see manufacturer's instructions.	<u>S</u>	<u>h</u>	40 mm ~>	1,2...1,3 m	50 mm ~>	1,5...1,7 m	60 mm ~>	1,8...2,0 m	70 mm ~>	2,1...2,5 m	
<u>S</u>	<u>h</u>											
40 mm ~>	1,2...1,3 m											
50 mm ~>	1,5...1,7 m											
60 mm ~>	1,8...2,0 m											
70 mm ~>	2,1...2,5 m											

② 905104  M10	PCS		PCS
	4		
	PCS		PCS



905104



Tuotekyltti tulee tuotteen mukana yhdellä seuraavista tavoista:

1) Metallinen tuotekyltti ja kiinnitysruuvit

- Kiinnitä tuotekyltti ruuveilla tolppaan noin 2 metrin korkeuteen kuvan 1 mukaisesti.

2) Tuotekyltitarra

- Puhdista maalattu metalli- tai vaneripinta pölystä ja kosteudesta. Liimaa tarra kuvan 2 mukaisesti.
- Huom. Älä kiinnitä tarraa karheapintaiseen laminaattiin tai maalattuun puuhun.

Vår produktmärkning levereras på ett av följande sätt:

1) Produktskylt i metall

- Fäst skylten med de medföljande skruvarna

2) Självhäftande produktetikett

- Rengör den pulverlackerade metallytan eller laminatyten så att den blir fri från smuts och fukt. Fäst etiketten enligt fig. 2.
- Obs! Fäst ej etiketten på detaljer med skrovlig yta eller på målat trä.

Product label is delivered by one of following ways:

1) Metal product label and screws

- Fasten the label with screws.

2) Label sticker

- Clean the painted metal or plywood surface from dirt and moisture. Fasten the sticker as shown in the figure 2.
- Note. Do not attach the sticker to rough surfaced laminate or painted wood.

La plaque d'informations produit est livrée sous l'une de ces 3 formes :

1) Plaque métallique et vis

- Fixez la plaque à l'aide des vis.

2) Etiquette autocollante

- Avant de coller l'étiquette, nettoyez le composant métallique peint ou la plaque de contreplaqué, de toute saleté. La surface doit être sèche (voir image 2).
- Attention, ne pas coller l'étiquette sur une surface lamellé-collée irrégulière ou sur du bois peint.


Die Auslieferung des Produktaufklebers erfolgt auf eine dieser Arten:

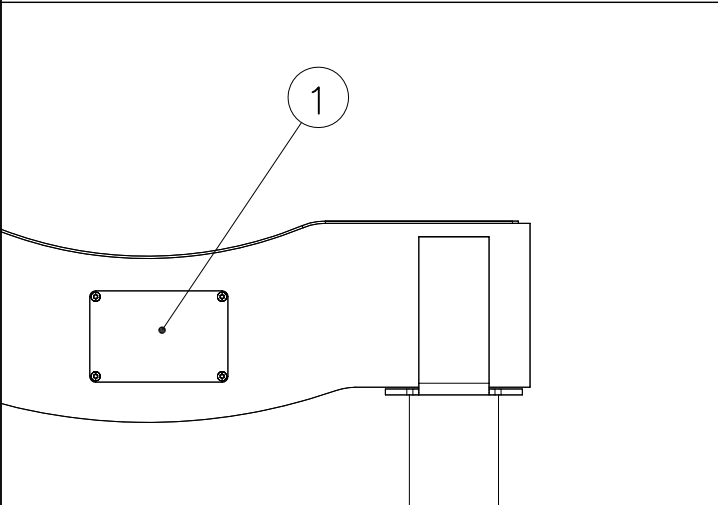
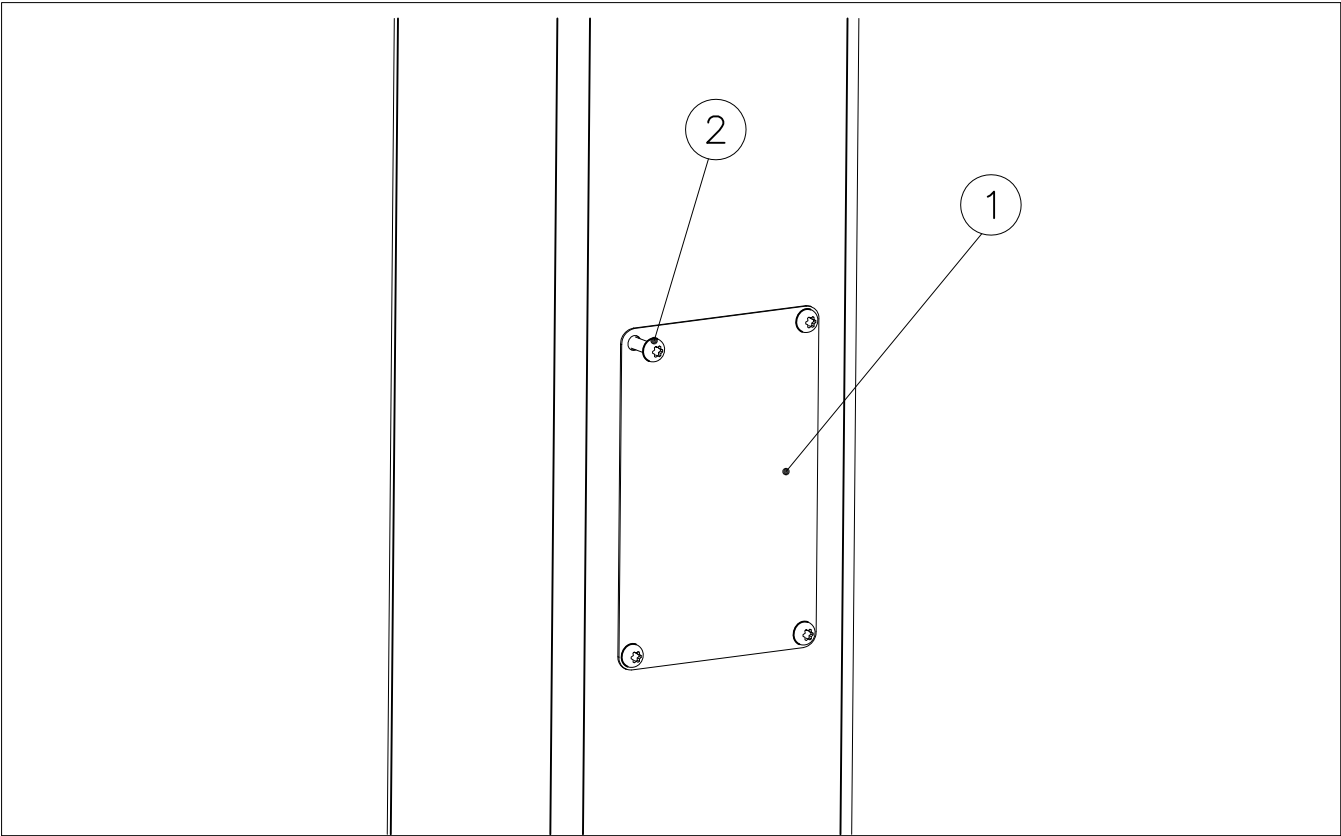
1) Produkt-Schild aus Metall incl. Schrauben

- Die Befestigung des Schildes erfolgt mittels der Schrauben.

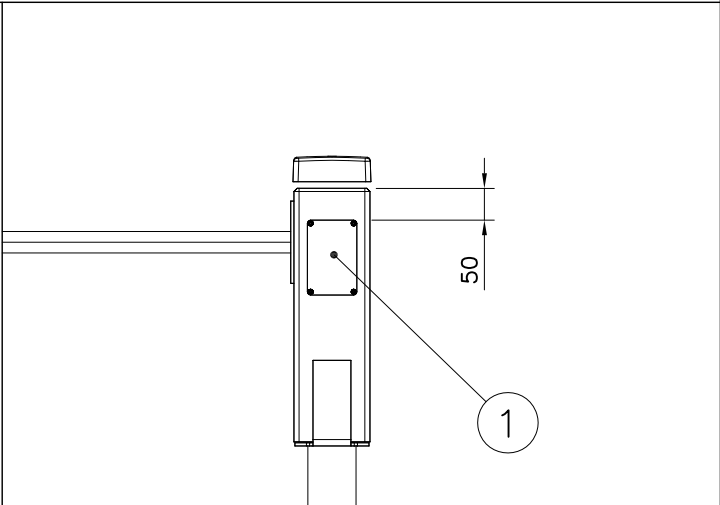
2) Aufkleber

- Entfernen Sie zunächst Schmutz und Feuchtigkeit vom lackierten Metall bzw. von der Holzoberfläche und bringen Sie den Aufkleber wie im Bild oben rechts beschrieben auf den gesäuberten Untergrund auf.
- Beachten Sie: Bringen Sie den Aufkleber nicht auf raues laminiertes oder lackiertes Holz an.

①	SHEET METAL	PCS	②	980114	PCS
		1		4	
	118x78x0.7		Ø4x20		

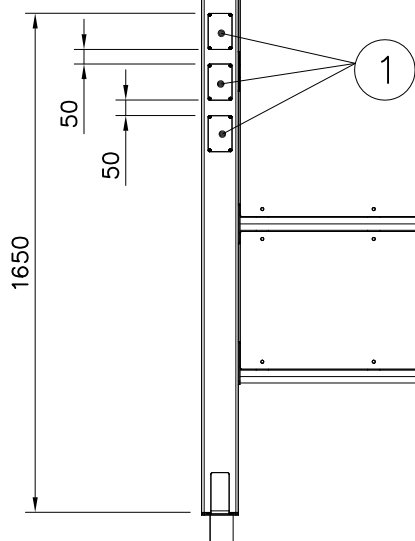


Example installation !
Esimerkki asennus !

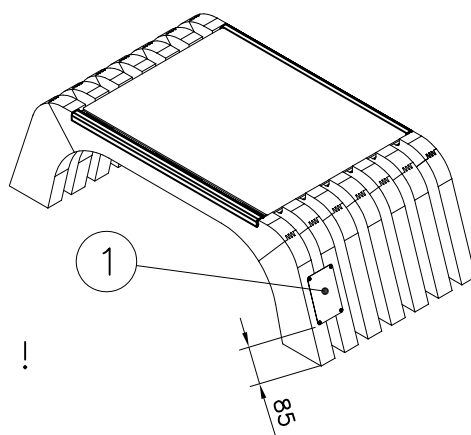
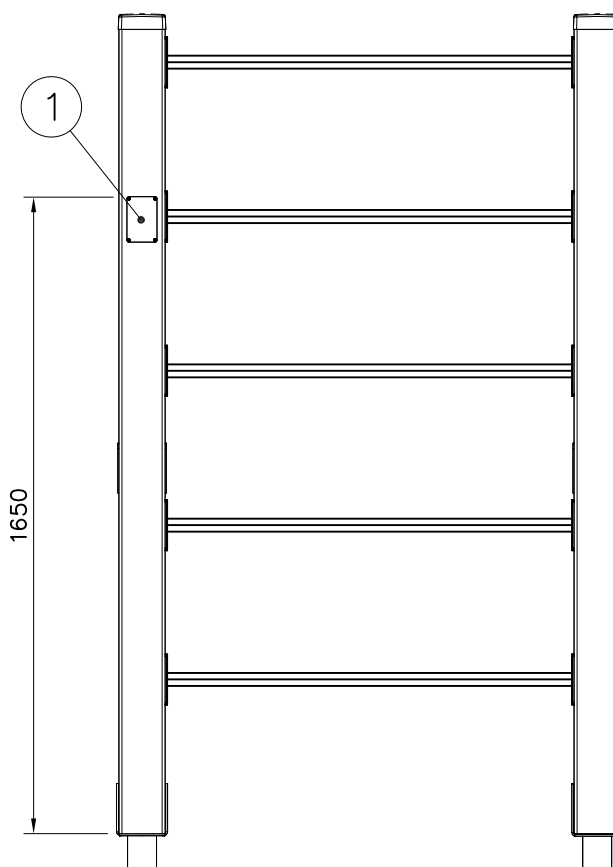


Example installation !
Esimerkki asennus !

Example installation !
Esimerkki asennus !



Example installation !
Esimerkki asennus !



Example installation !
Esimerkki asennus !