


FUNCTIONAL FITNESS

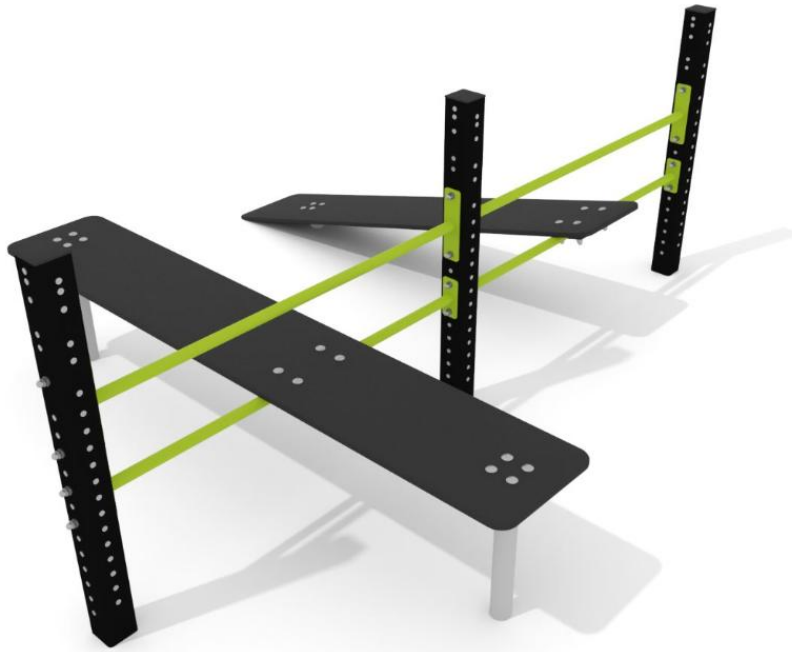

Number of users	2
Max. free fall height, mm	1210
Safety info	EN 16630 TÜV
Installation time (for 1), h	4